

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT

4

USED ON

ASSY. NO.



DATE

6-11-62

MODEL

HFR-1/T

AC 164 A

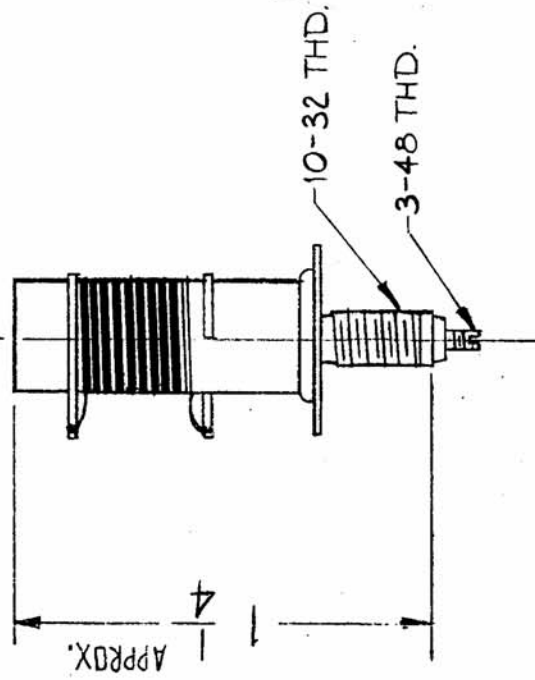

MODEL	REQ	FUNCTION	FREQ(MC)	SYMBOL
HFR-1	4	BAND 1 RF STAGE 1,2,3A	2-3	L1001, L1005, L1007, L1009

ELECTRICAL SPECS:

TEST FREQ. - 25 MC

MAX IND. - 4.25 μ h (REF.)

MIN IND. - 1.95 μ h (REF.)

Q - 45 MIN @ MIN IND.

MECHANICAL SPECIFICATIONS

COIL RF TUNED.

WINDING DATA: TYPE SINGLE LAYER,
NO. OF TURNS, 20

COIL FORM DATA: MATERIAL = STEATITE, HOLLOW.

CORE DATA: QUANTITY = 1 MATL = POWDERED IRON,
ADJUSTABLE.

TERMINAL DATA: QUANTITY = 2 RING TERMINALS

SCHEMATIC



BYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	ELECT. SPECS. REVISED	10-3-64	16958	11/2	QFB	2
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON FRAC. \pm 1/64 DEC. \pm .005 ANGLES \pm 1/2°						
SCALE: A - 249Z MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.						

REQ. ITEM	PART NO.	ANGER	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
			COIL, RF, TUNED	
		G.D.L	FILE	BP
		J. ANGER	CHECKED	FINAL APPROVAL
			DRAWN	
			ELEC. DES. APP.	
			MECH. DES. APP.	
				AC 164 A