


A
A 4493

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	11/12/68				
Ø	ORIGINAL RELEASE FOR PRODUCTION	8/12/69			C.V	
A	REDRAWN FROM PHOTO TO LINE DWG	10/21/70	20049		W	DEA

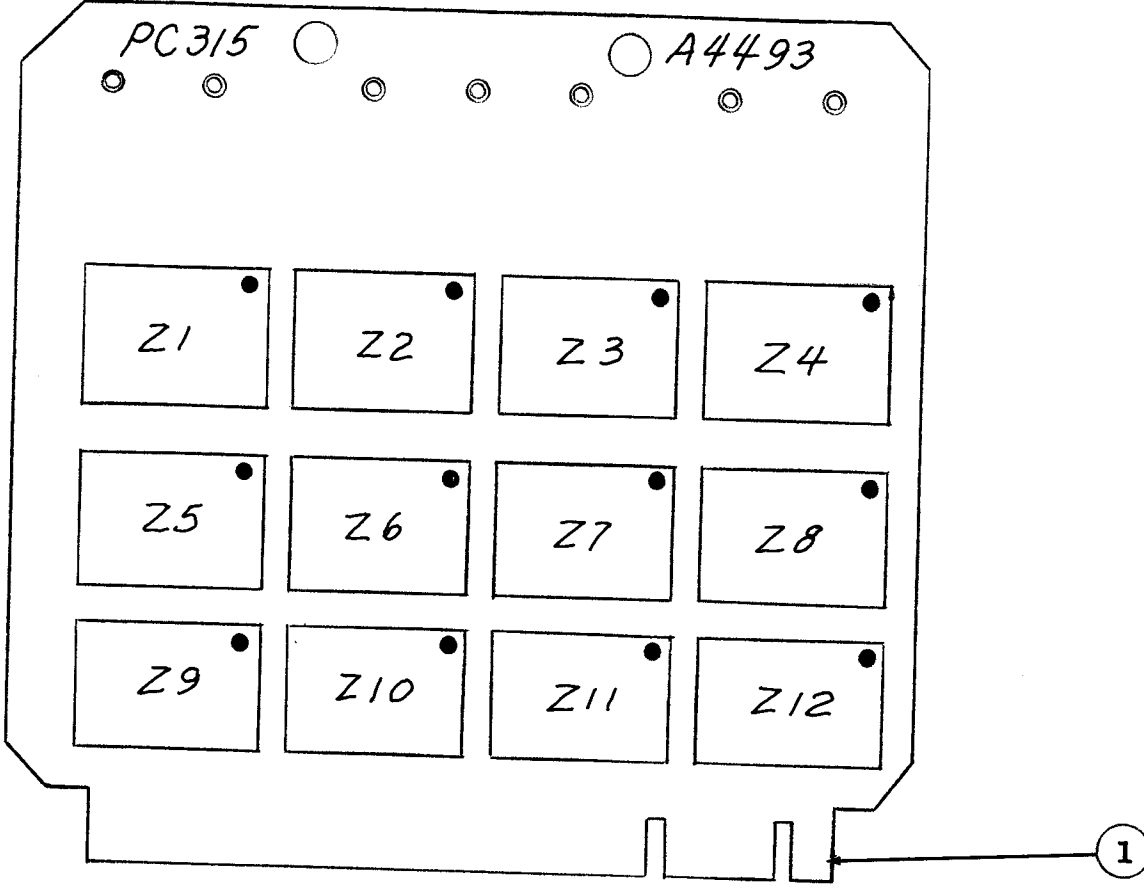

ASSEMBLY NOTES

1. TO MOUNT COMPONENTS INSERT LEAD THROUGH PLATED THRU-HOLES.
2. CAUTION: WHEN APPLYING HEAT AND SOLDER TO LEAD AND FOIL.
3. CLEAN AND INSPECT AS PER TMC SPEC S676.
4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NPL A4493
5. USE SYMBOL NUMBERS FOR ASSEMBLY REFERENCE.

80%
5-18

RTIH-3,4		ASS'Y. NO.
Q'TY./UNIT	MODEL USED ON	
SCALE	CODE	8401-451
	A	

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
X	2	BS100	SOLDER, TIN ALLOY	
I	1	PC315	PRINTED CIRCUIT BOARD	

LIST OF MATERIAL

MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH		TITLE PC315 ASSEMBLY GATING CIRCUIT			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN	DATE	FINAL APPROVAL	DATE
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		CHECKED <i>R. Uzzo</i>	DATE 8/7/69	<i>S. Di Marco</i>	8-11-69
FRACTIONS ± 1/64 ANGLES ± 0° 30'		ELECT. DES.	DATE	A 4493	
TOLERANCES		MECH. DES. <i>R. Uzzo</i>	DATE 8-7-69	SHEET	
					A
					REV. LTR.

NOTES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.