


A4508

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXP. RELEASE	1-	X	G.D.L		
Ø	ORIGINAL RELEASE FOR PRODUCTION	2/23/67	Ø	CV		

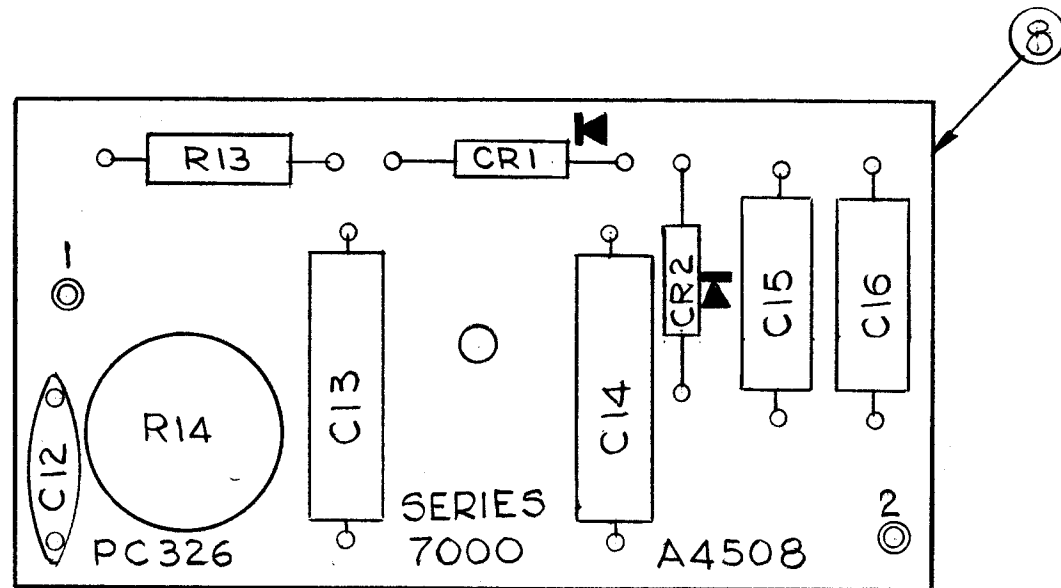

ASSEMBLY NOTICE

- 1- TO MOUNT COMPONENTS INSERT LEADS THROUGH PLATED-THRU HOLES.
- 2- BE CAUTIOUS : WHEN APPLYING HEAT & SOLDER TO LEAD & FOIL .
- 3- CLEAN AND INSPECT AS PER S676.

1	8	PC 326	PRINTED CIRCUIT BD	
1	7	RVIIIU104A	RESISTOR , VAR, COMP	R7014
1	6	RC 206 F103 J	RESISTOR, FXD, COMP	R7013
2	5	IN 34 A	SCOND. DEV., DIODE	CR7001 CR7002
1	4	CM 15 F470G03YY	CAPACITOR, FXD, MICA	C7016
1	3	CM 15C100G03YY	CAPACITOR, FXD, MICA	C7015
2	2	CM 20F102G03	CAPACITOR, FXD, MICA	C7013 C7014
1	1	CC100-16	CAPACITOR, FXD, CER.	C7012
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL

MATERIAL		LIST OF MATERIAL	
#		#	
FINISH		FINISH	
#		#	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES ± 1/64 ANGLES ± 0° 30'	
DATE 11-22-66 DATE DATE		FINAL APPROVAL [Signature] DATE DATE	
SCALE 2:1 MODEL USED ON SWCA-3K ASS'Y. NO. CODE		ASS'Y, PRINTED CIRCUIT BOARD A4508	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		SHEET REV. LTR.	

NOTES