
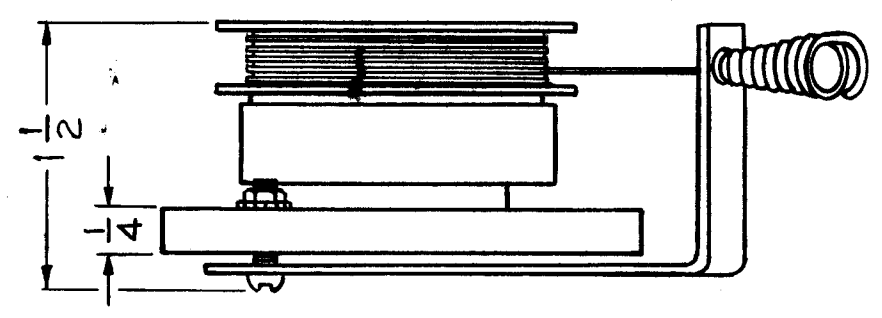


AS-116 B

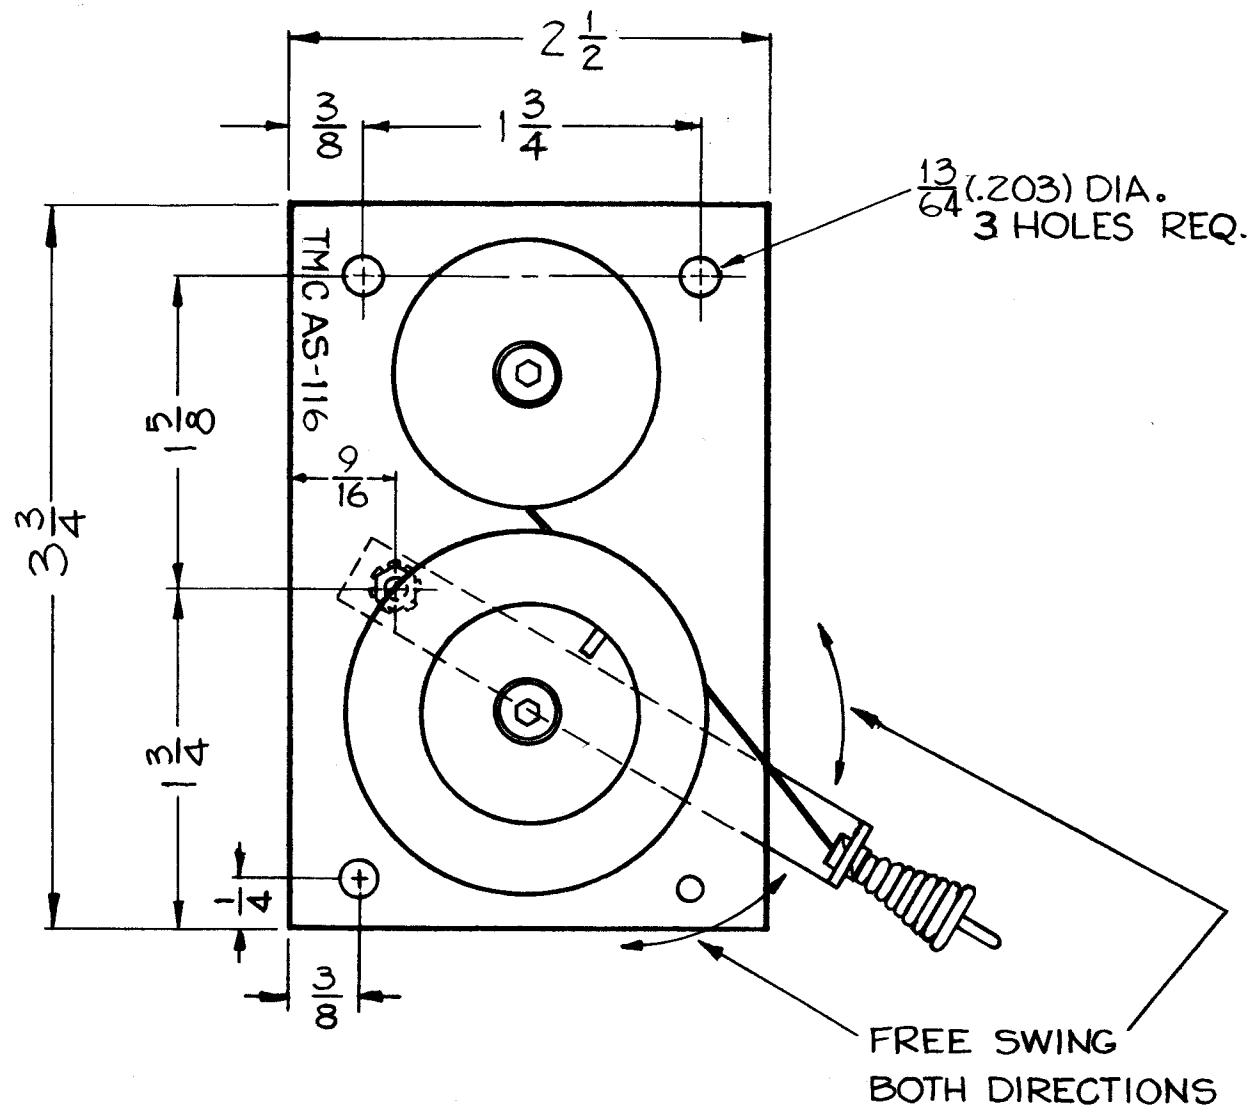

SPECIFICATIONS ~

- TORQUE ~ 1.56 LBS. / INCH
- CABLE LOAD ~ 2 LBS.
- NO. OF ROTATIONS ~ 20
- CABLE LENGTH ~ 72"
- SPRING MATERIAL ~ STAINLESS STEEL
- SPRING WIDTH ~ 3/8"
- SPRING THICKNESS ~ .005
- SPACE REQUIREMENTS ~ 1 1/2 X 2 1/2 X 3 3/4
- BASE ~ 1/4" THICK BLACK BAKELITE
- ENDURANCE ~ (MIN CYCLES) 2500

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	1	Ø 13/64 DIA. Hole Added	2-16-61	4193	RU	JCS	AK
A	1	1 3/4 WAS 1 3/8	1-27-60	1817	AK	Whe	AK

TOLERANCES: SCALE: NPL ZA1787

DEC. DIM. ±  
FRAC. DIM. ±  
ANGULAR DIM. ±

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

2	SBT-1K			10-27-59
REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
USED ON				

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		ASSEMBLY, SPRING RETRACTING	
		J.C. Biele	
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
		FINAL APPROVAL	
		AS-116 B	
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.