


THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT & TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

SYMBOL - DENOTES

- = ITEM NO'S
- = WIRE MARKERS
- ⬡ = LUGS

CA1132


REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
Ø	ORIGINAL RELEASE FOR PRODUCTION	3/4/66	Ø	HLL		JL

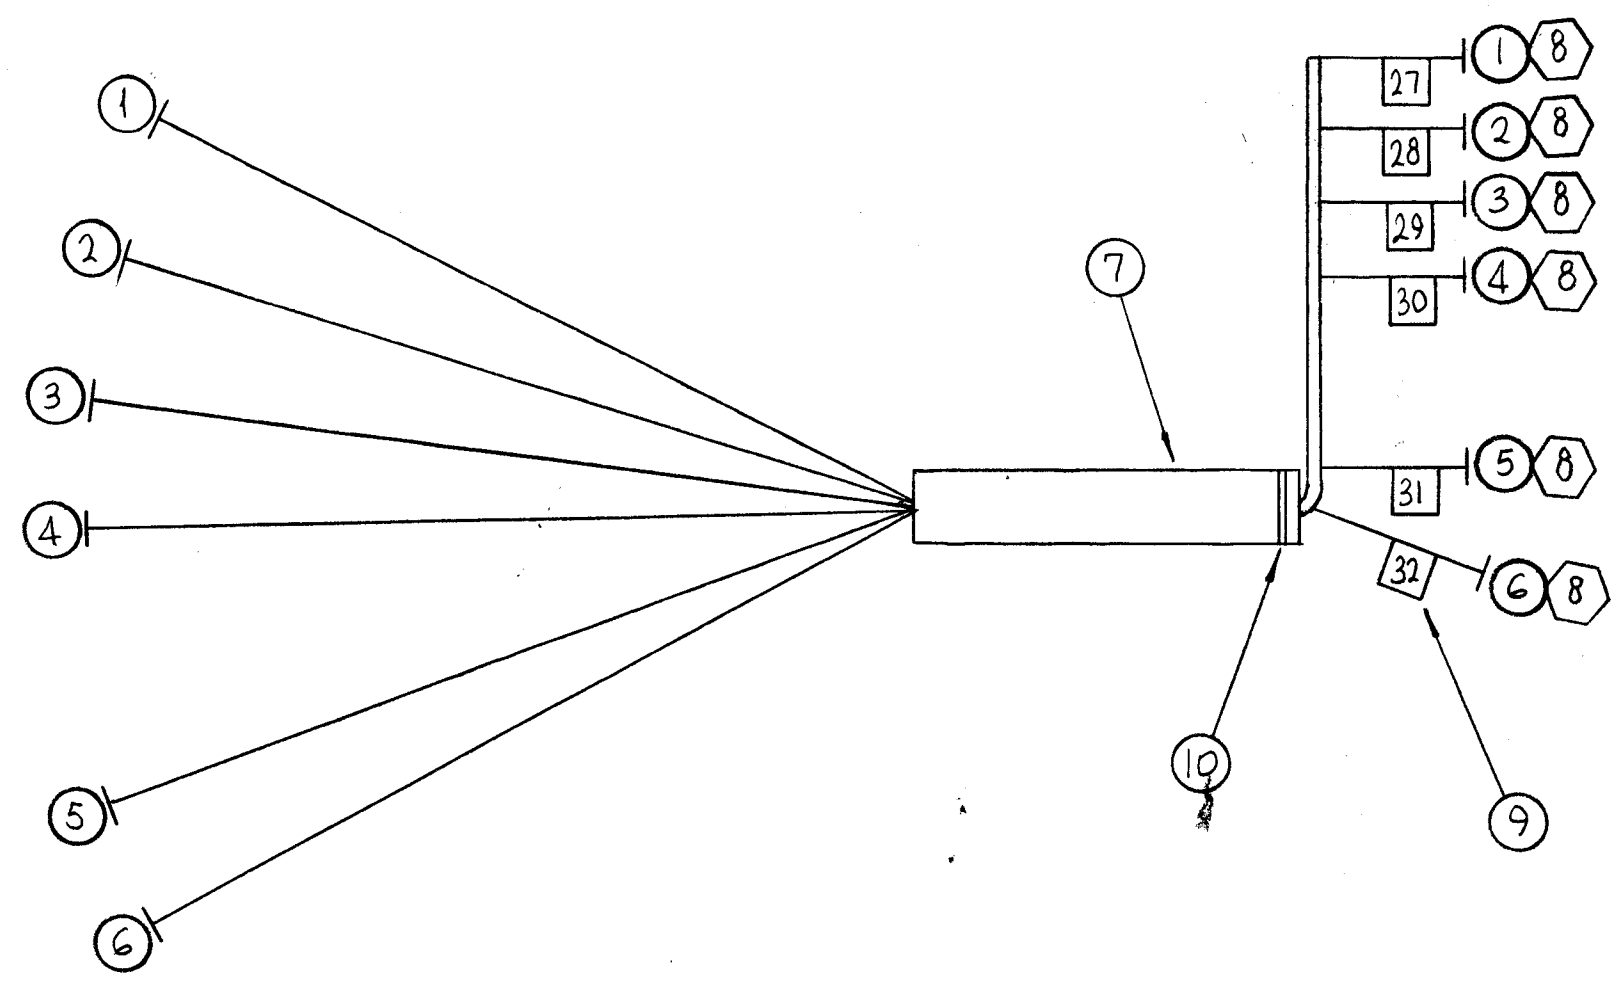

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

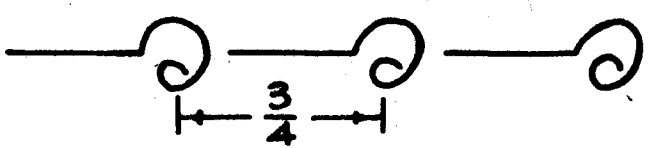

NOTES

REQ'D.	ITEM	PART NUMBER	FROM	TO
	11	BS 100		SOLDER, TIN ALLOY
	10	CD 101-1MW		CORD, NYLON, LACING
	9	LA 101		MARKER, WIRE
	8	TE 120-2		LUG, SPADE
	7	PX 100-1-234		INSULATION SLEEVING
	6	MWC 20(7)U4	E 703 # 32	K 704 COIL
	5		E 703 # 31	COIL
	4		E 702 # 30	C-COMM.
	3		# 29	C-N.C.
	2		# 28	A-COMM.
	1	MWC 20(7)U1	E 702 # 27	K 704 - N.C.

F. BUDETTI LIST OF MATERIAL

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

WIRING HARNESS, BRANCHED

DRAWN	SRG	DATE	5-24-65	FINAL APPROVAL		DATE	3/4/66
CHECKED	JLB	DATE	3-2-66				
ELECT. DES.	JLB	DATE	3-14-66				
MECH. DES.		DATE					

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° 30'

TOLERANCES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

SHEET

REV. LTR.