


CA1143 A

REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
Ø	ORIGINAL RELEASE FOR PRODUCTION	7-27-65	-M-	JC		
A	IT.1 MWC24/7/00 RELOCATED	14/65	14929	R.V.V.	JL	MM

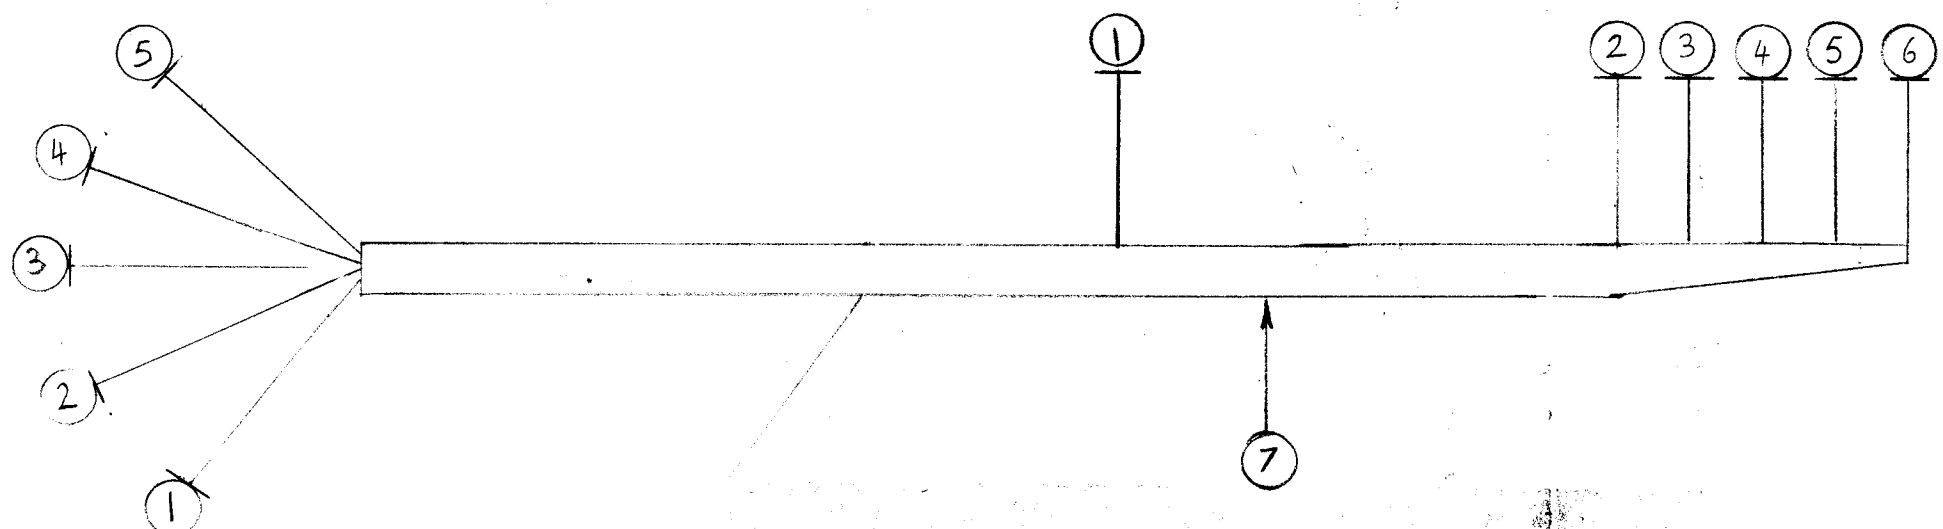


UNLESS OTHERWISE SPECIFIED
 WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE
 AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

EXTEND TO 15"

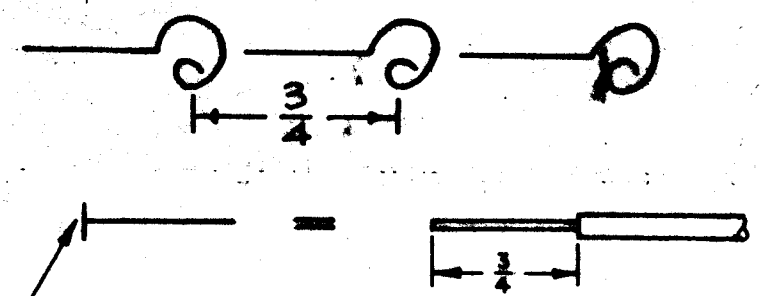

THIS SYMBOL DENOTES END OF INSULATION
 AND NAIL DRIVING POINT. WIRE MUST BE
 STRIPPED 3/4" BEYOND THIS POINT AND
 TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

X	9	CD101-1-MW	CORD, LACING			
X	8	BS-100	SOLDER, SOFT			
X	7	PX-100 -1-234	INSULATION, SLEEVING			
	6	MWC 24 (7) U 6	J-1500	PIN#2	TB 1502 TERM# 11	BLUE
	5	MWC 24 (7) U 4	S-1512	PIN#4	TB 1502 TERM# 10	YELLOW
	4	MWC 24 (7) U 5	S-1512	PIN#3	TB 1502 TERM# 9	GREEN
	3	MWC 24 (7) U 2	S-1512	PIN#2	TB 1502 TERM# 8	RED
	2	MWC 24 (7) U 9	S-1512	PIN#1	TB 1502 TERM# 7	WHITE
	1	MWC 24 (7) U 0	S-1512	WIPER	GROUND	BLACK

REQ'D.	ITEM	PART NUMBER	FROM	TO	SYMBOL	
POSE LIST OF MATERIAL						
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH						
			CABLE, ASS'Y			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN	DATE	FINAL APPROVAL	DATE
			CHECKED	DATE		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'	
			ELECT. DES.	DATE	CA1143	
MECH. DES.	DATE	SHEET	REV. LTR.			

TTR-11		
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY
 OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR
 REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

NOTES