



REQ. PER UNIT	1
MODEL	KIT 180
ASBY. NO.	
DATE	5 JAN 66
CA1210	

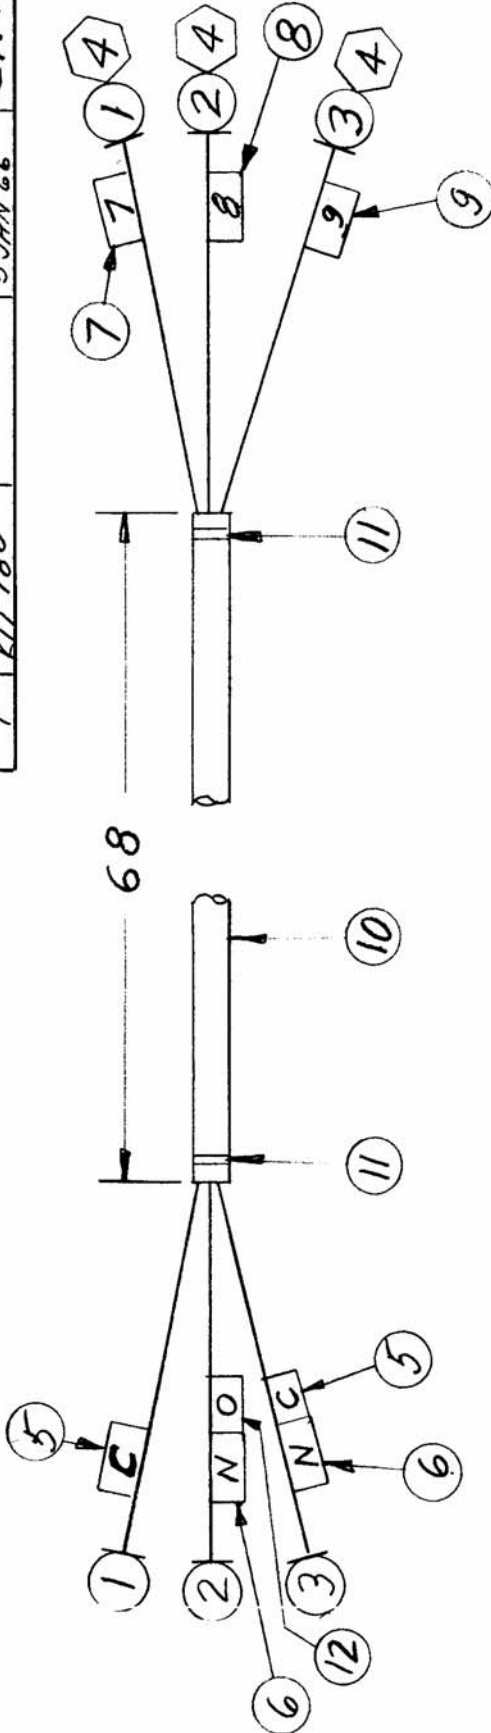

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
1	LA101-0	BAND, MARKER, CBL	
X	CD101-1MW	CD, NYLON, LACING	
10	PX100-1-208	INS SLVG	
1	LA101-9	BAND, MARKER, CBL	
1	LA101-8	BAND, MARKER, CBL	
1	LA101-7	BAND, MARKER, CBL	
2	LA101-N	BAND, MARKER, CBL	
2	LA101-C	BAND, MARKER, CBL	
3	TFE120-2	TERM., LUG-SPADE NO. 6	
3	MWC20(7)U91	WIRE, ELEC, INS	
2	MWC20(7)U90	WIRE, ELEC, INS	
1	MWC20(7)U95	WIRE, ELEC, INS	
STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK.	
MATERIAL		CABLE SPECIAL PURPOSE	
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	DATE 12/2/66
FINISH & SPEC. NO.		ELEC. DES. APP. MECH. DES. APP.	MECH. DES. APP. CA1210

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	7/2/66				AWD
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE				
TOLERANCES		FRACTIONS		CODE		
X ± .05		± 1/64				
XX ± .01		ANGLES				
XXX ± .005		± 0° 30'				