



REQ. PER UNIT: 1
 MODEL: KIT 180
 ASSY. NO.:
 DATE: 5 JAN 66
 USED ON: CA1212

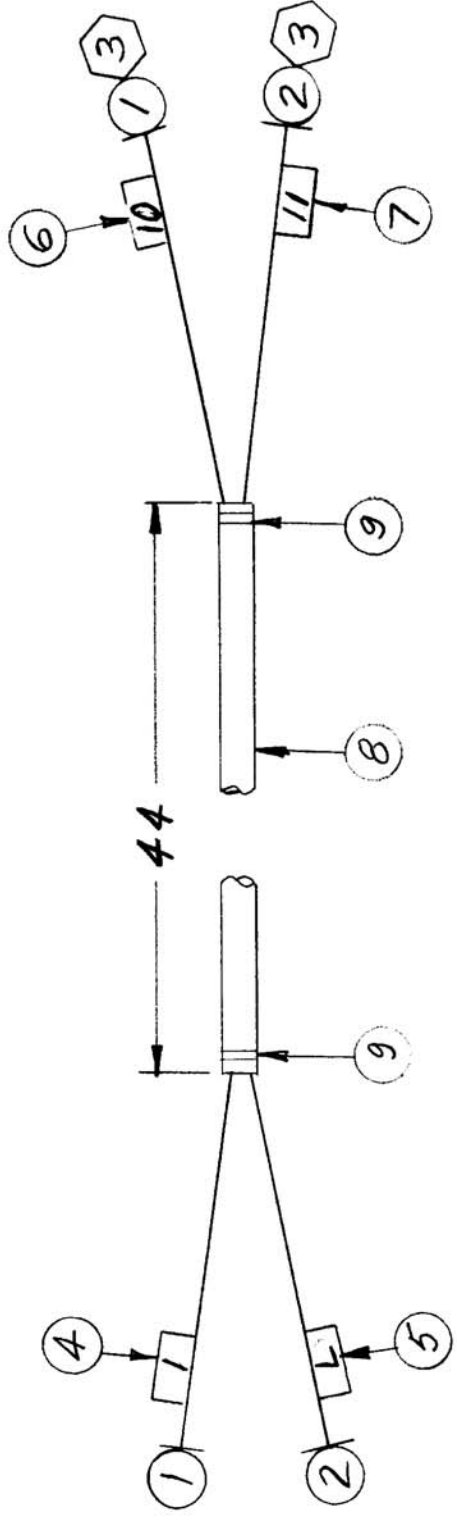

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 11	BS 100	SOLDER, TIN ALY	
X 10	CD101-1MW	CD, NYLON, LACING	
X 9	PX100-1-166	INS SLVG	
1 8	LA101-11	BAND, MARKER, CBL	
1 7	LA101-10	BAND, MARKER, CBL	
1 6	LA101-L	BAND, MARKER, CBL	
1 5	LA101-1	BAND, MARKER, CBL	
1 4	TE120-2	TERM., LUG-SPADE NO. 6	
2 3	MWC2067)U95	WIRE, ELEC, INS	
1 2	MWC2071)U95	WIRE, ELEC, INS	

STOCK SIZE	MATERIAL
	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK
	CABLE, SPECIAL PURPOSE

TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
		JMP	JMP 2/2/66	[Signature]

FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
	RJP	

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	2/2/66				[Signature]
X 1	IT 6 WTS LA101-9					
X 1	IT 7 WTS LA101-10					

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE

DECIMALS	FRACTIONS	TOLERANCES	CODE
.X ± .05	± 1/64		
.XX ± .01	ANGLES		
.XXX ± .005	± 0° 30'		