
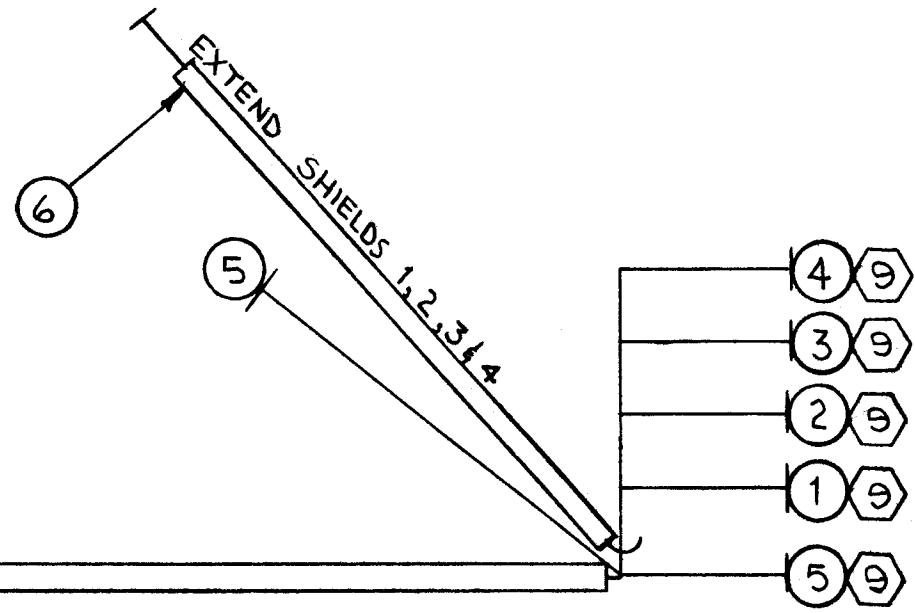



CA1300

REVISIONS


SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	11-16-66	X	RME		
Ø	ORIGINAL RELEASE FOR PRODUCTION	1/30/67	Ø	CV		

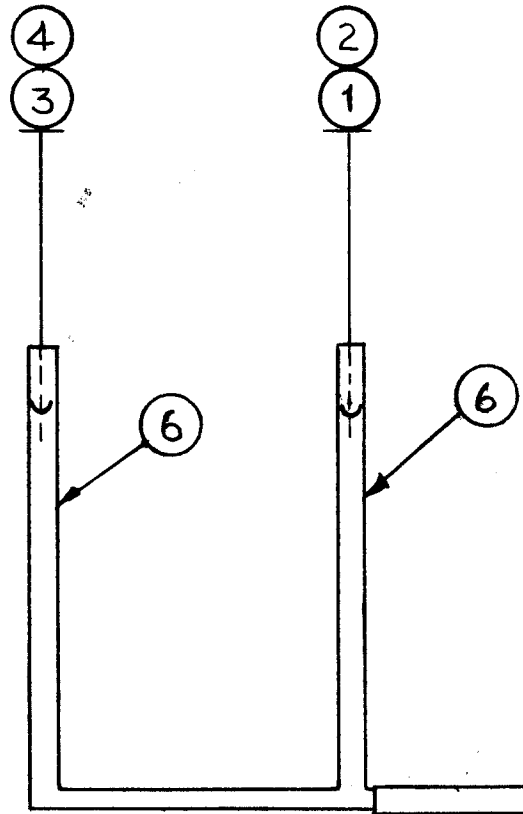


THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.



THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH UNLESS OTHERWISE SPECIFIED



THIS SYMBOL INDICATES END OF SHIELDING



REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
	5	9	TE 120-2	LUG, SPADE
		8	CD 101-1 MW	LACING, NYLON
X	7	PX100-1-208	SLEEVING, INSULATION	
X	6	PX100-1-148	SLEEVING, INSULATION	
X	5	MWC22(7) UO	WIRE, ELECTRICAL	BLACK
X	4	MWC22(7) SJ2	WIRE, ELECTRICAL, SHIELDED	RED
X	3	MWC22(7) SJ6		BLUE
X	2	MWC22(7) SJ5		GREEN
X	1	MWC22(7) SJ4	WIRE, ELECTRICAL, SHIELDED	YELLOW

LIST OF MATERIAL

Wires should be placed in cable in numerical sequence as they appear in item column by category.


- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

SYMBOL DENOTES

○ = ITEM NO.

⬡ = LUG NO.

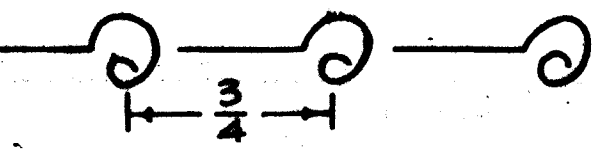

Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	APP-15	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005

FRACTIONS: ± 1/64 ANGLES ± 0° 30'

TOLERANCES

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: CABLE, ASS'Y.

DRAWN: RME
CHECKED: *file*
ELECT. DES.: *AB*
MECH. DES.:
DATE: 11-16-66
FINAL APPROV.: *[Signature]*
DATE: 1/30/67

CA1300

SHEET: Ø
REV. LTR.