


CA1303

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXP. RELEASE	11-21-66			aa	BB
Ø	ORIGINAL RELEASE FOR PRODUCTION	12/2/66	Ø	CV		

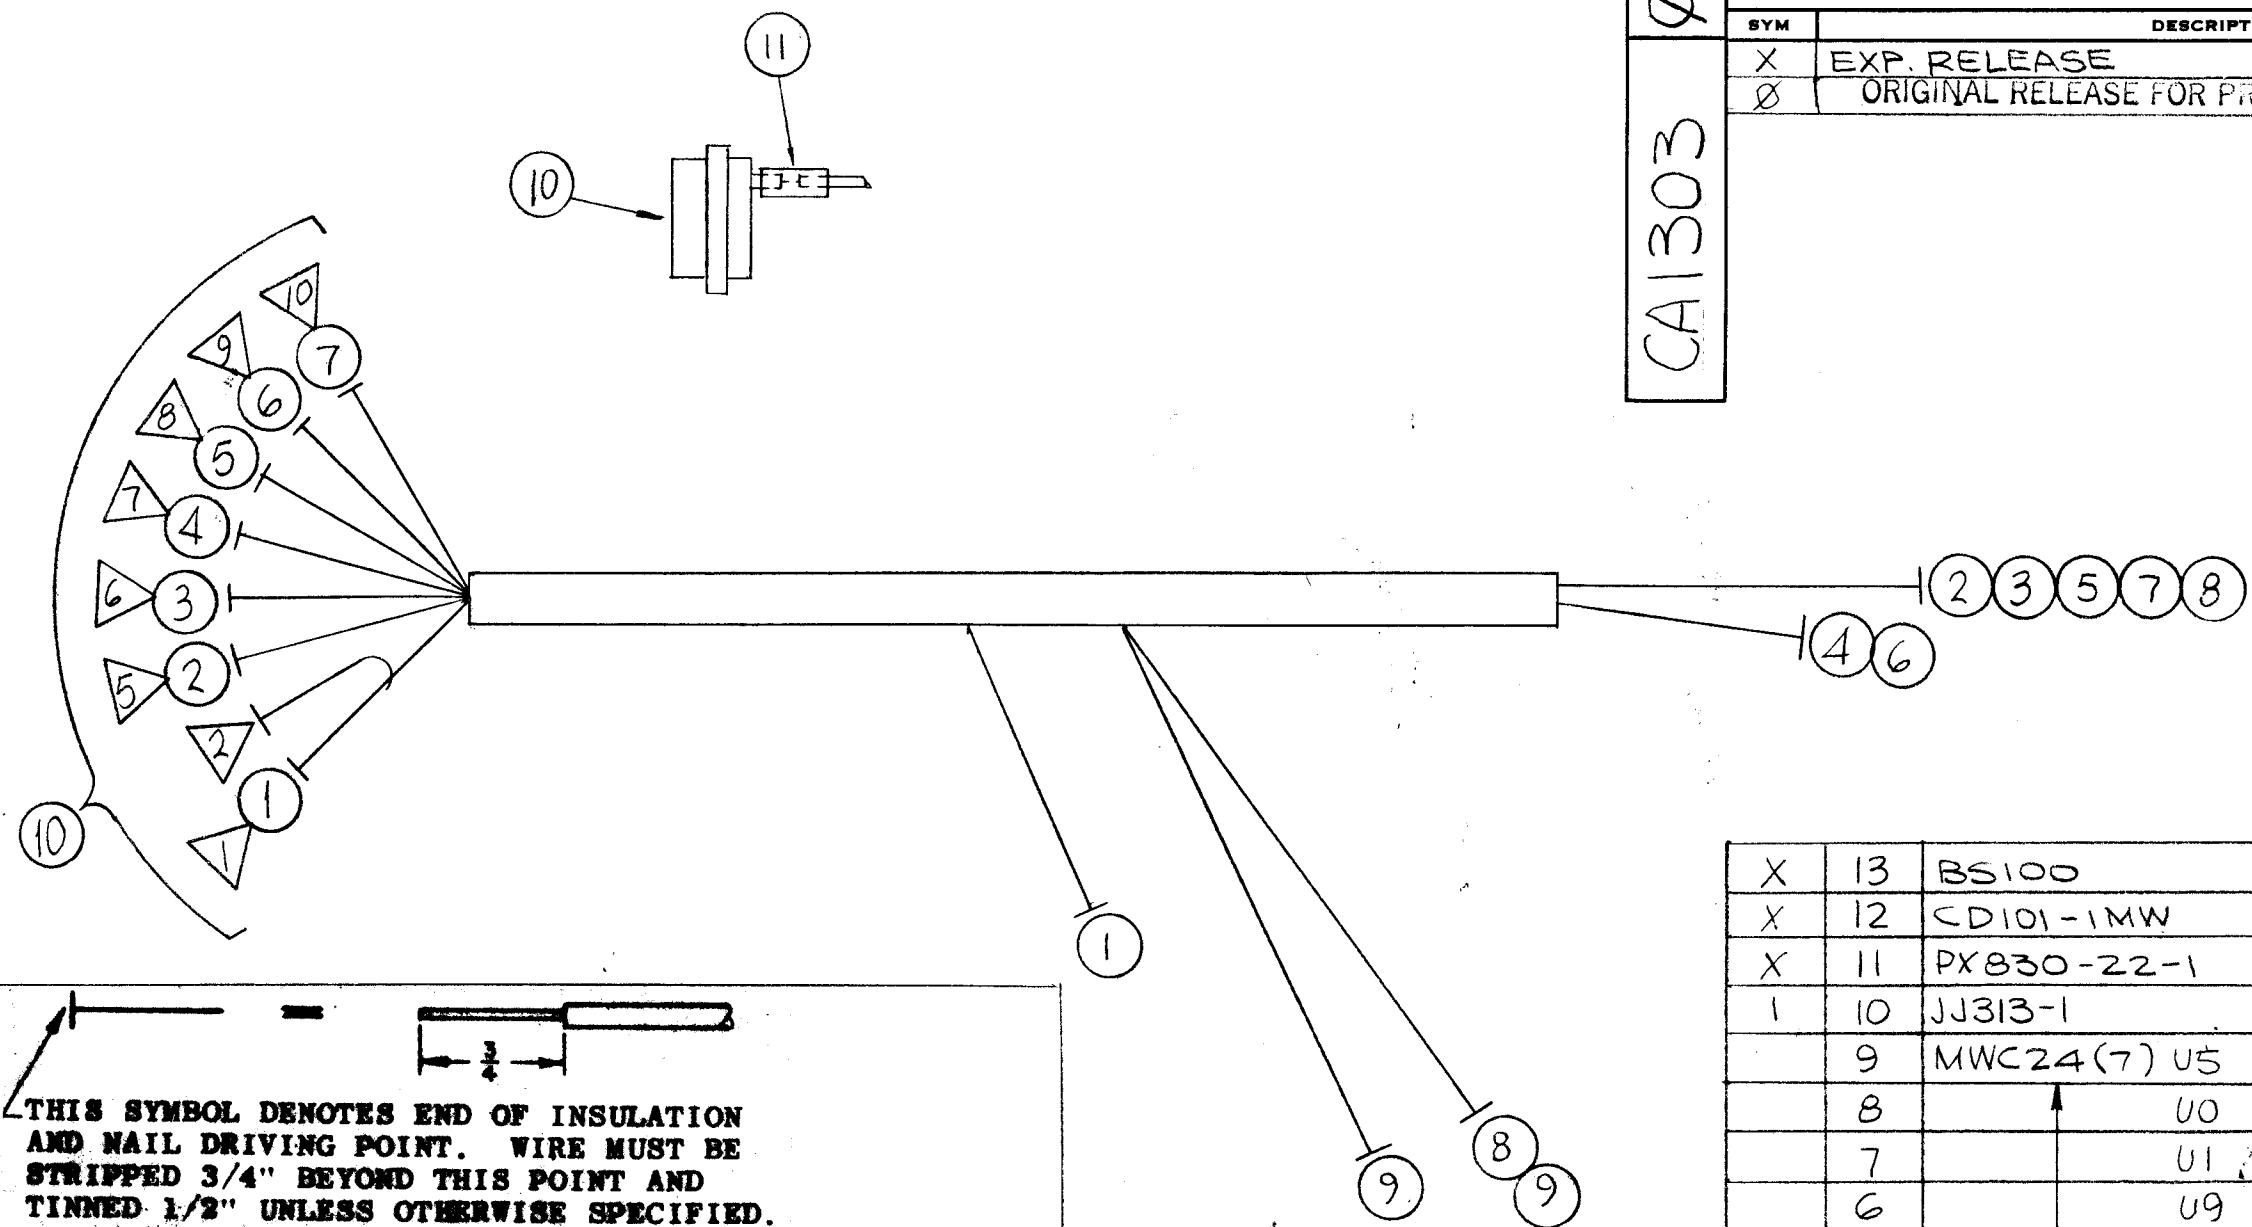


THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

SYMBOL - DENOTES
 ○ = ITEM NO'S
 △ = PINS



THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

NOTES

X	13	BS100	SOLDER, TIN ALLOY	
X	12	CD101-1MW	CORD, NYLON LACING	
X	11	PX830-22-1	INS. SLVG. ELEC.	
1	10	JJ313-1	CONN. RECP ML.	
	9	MWC24(7) U5	R7016	PC BD
	8	U0	GRD	S7002B COM.
	7	U1	J7009 PIN 10	S7002A COM.
	6	U9		S7003 COM.
	5	U8		S7002B NO.
	4	U7		S7003 NC
	3	U3		S7002B NC
	2	U2		S7002A NO.
	1	MWC24(7) SJG	J7009 PIN 1	PC BD

REQ'D.	ITEM	PART NUMBER	FROM	DESCRIPTION	TO	SYMBOL
--------	------	-------------	------	-------------	----	--------

F. BUDETTI LIST OF MATERIAL

MATERIAL

FINISH

TITLE

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CABLE, BRANCHED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05 .XX ± .01 .XXX ± .005

FRACTIONS ± 1/64 ± 0° 30'

TOLERANCES

DRAWN

CHECKED

ELECT. DES.

MECH. DES.

DATE 11-21-66

DATE 11-30-66

DATE

DATE

FINAL APPROVAL

CA1303

DATE 12/2/66

SHEET

REV. LTR.

1	SWCA-3K	BMA 129
QTY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE A	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		