


~ SYMBOL DENOTES ~

○ = ITEM NOS.

⬡ = TERM. LUGS

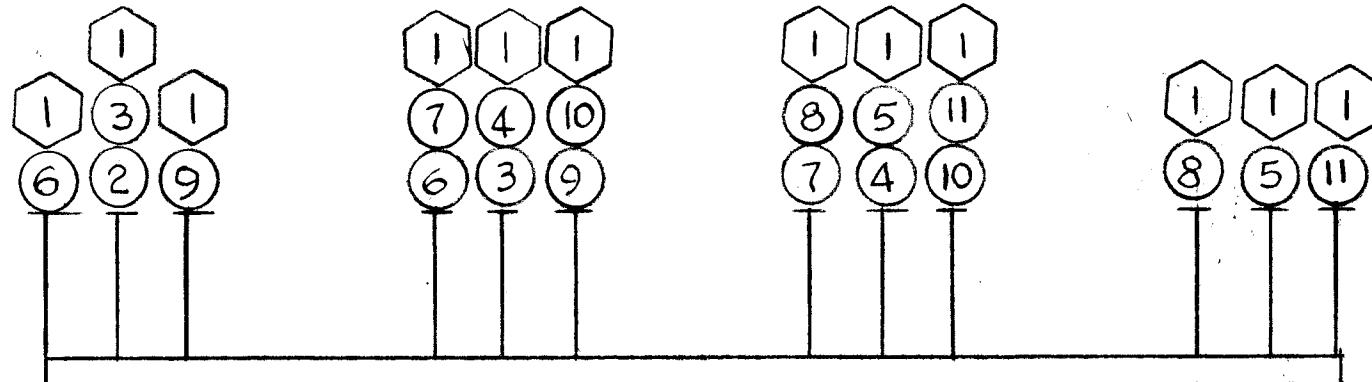


THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED, WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.



1	TCGA-1	AX658
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
CODE		

**NOTICE TO PERSONS RECEIVING THIS DRAWING**  
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	Ø	ORIG RELEASE FOR PROD	4.4.67		RG	

13	BS100	SOLDER, SOFT, TIN ALLOY	
12	CD101-1MW	CORD, NYLON, LACING	
11	MWC20(7)U9	J2	J1
10		9	J2
9		9	J4
8		8	J2
7		8	J2
6		8	J4
5		0	J1
4		0	J3
3		0	J3
2	MWC20(7)U0	GRD	J4
12	1	TE 159-32597	TERM. LUG

REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
<b>F E A T O N</b>				
LIST OF MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			FINAL APPROVAL <i>[Signature]</i> DATE 9/4/67	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			ELECT. DES. DATE	
FRACTIONS 1/64 ANGLES 0°-30'			CHECKED <i>[Signature]</i> DATE	
MATERIAL			DRAWN G.D.L. DATE 1-9-67	
FINISH			DATE	
<b>THE TECHNICAL MATERIEL CORP.</b> MAMARONECK, NEW YORK				
<b>CABLE, ASS'Y</b>				
SIZE	CODE IDENT. NO.	DWG NO.	ISSUE	
B	82679	CA1314	Ø	
SCALE 1:1			SHEET OF	