


REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	X	EXP. RELEASE	8/28/69		KH	
	Ø	ORIGINAL RELEASE FOR PRODUCTION	4/13/70		W	

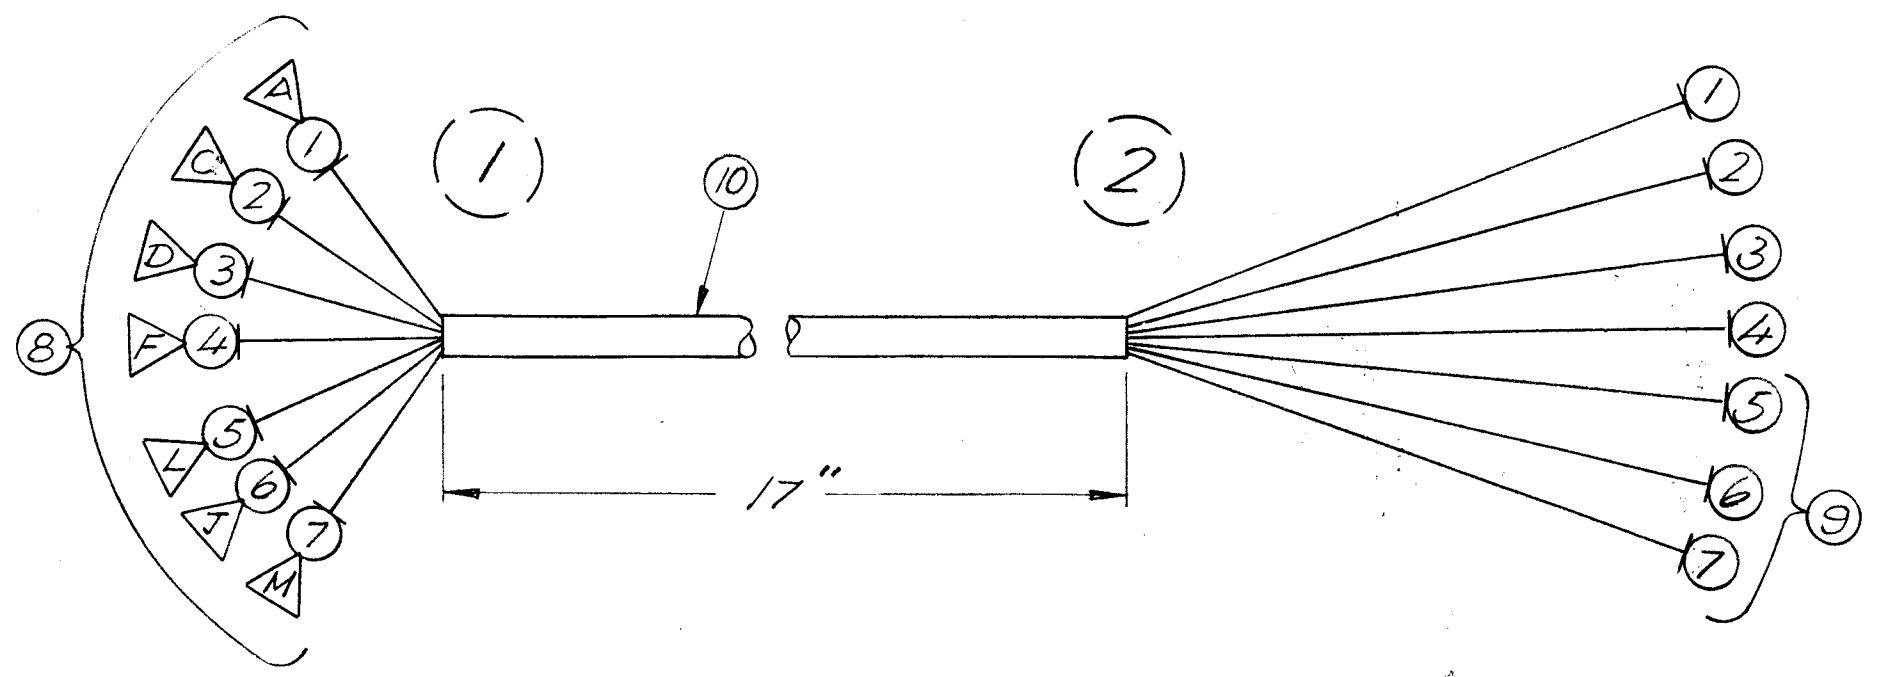


SYMBOL DENOTES


○ = ITEM NO'S

△ = CONNECTOR PINS

⊕ = BREAKOUT LOCATIONS

 THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.



X	11	BS 100	SOLDER SOFT					
X	10	PX100-1-263	FLEX. TUBING					
3	9	TE120-2	SPADE LUG					
1	8	PL225-3F	CONNECTOR					
1	7	MWC22(7)U90	1	2	PL225-3F PIN M TB2002-3			
1	6		8	1	2	J TB2002-2		
1	5		9	1	2	L TB2002-1		
1	4		0	1	2	F		
1	3		2	1	2	D		
1	2		5	1	2	C		
1	1	MWC22(7)U9	1	2	PL225-3F PIN A			
REQ'D	ITEM	PART NUMBER	FROM	TO	DESCRIPTION	FROM	TO	SYM.

LIST OF MATERIAL

1 RTIE - 1		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		FINAL APPROVAL <i>S. De Marco</i>		DATE 4-13-70		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
QTY / UNIT	MODEL USED ON	ASS'Y. NO.	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS 1/64 TOLS. ANGLES 0° - 30'	ELECT. DES.	DATE	DATE				
APPLICATION			MATERIAL		CHECKED <i>[Signature]</i>	DATE 8/5/69	DATE 8/28/69	SIZE B	CODE IDENT. NO. 82679	DWG NO. CA 1516	ISSUE Ø
CODE			FINISH		DRAWN <i>[Signature]</i>		SCALE 1:1		SHEET OF		
NOTICE TO PERSONS RECEIVING THIS DRAWING THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.											