



CA-322

REQ. PER UNIT	USED ON	DATE
1	ASBY. NO.	11-26-56
1	MODEL	12-5-58
	RTF	
	RTF-2	
	P/A	

19 ¹⁵/₃₂ " APPROX.

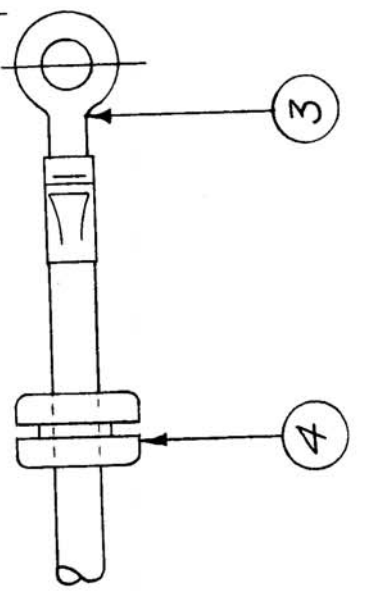

STRIP & TIN BOTH ENDS

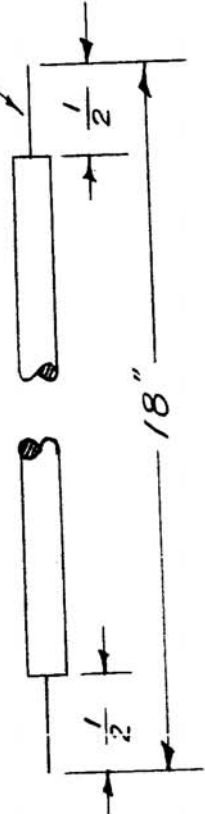

X 5	BS-100	SOLDER, SOFT	SYMBOL
1	EY-102-3	GROMMET, ELASTIC	
1	TE-155-34171	TERMINAL, SOLDERLESS	
1	TE-155-34170	TERMINAL, SOLDERLESS	RED.
18"	WI-126-1	WIRE, SINGLE COND.	
REQ. ITEM	PART NO.	DESCRIPTION	
		THE TECHNICAL MATERIEL CORP.	
		MAMARONECK, NEW YORK	
		LEAD, ELECTRICAL	
		RTF - P.A.	
		CHECKED	A.J.J.
		DRAWN	
		HEAT TREAT. SPEC.	
		FINISH & SPEC. NO.	CA-322
		TYPE & TEMPER	
		MATERIAL	
		STOCK SIZE	
		DATE	11-26-56
		CH. NO.	
		DRAFTS	
		CHECKER	
		ENG. APP.	

TOLERANCES

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.

REMOVE ALL BURRS AND SHARP EDGES

DEC. DIM. ±

FRAC. DIM. ± 1/32

ANGULAR DIM. ±