


# STANDARD DRAWING

REQ. UNIT  
 MODEL  
 USED ON ASSY. NO.  
 DATE

CA-349 B

FOR MARKING INSTRUCTIONS  
 SEE SPEC. LISTED

WHEN USED ON MODEL  
 CHG - 1  
 SEE SPEC. S-538

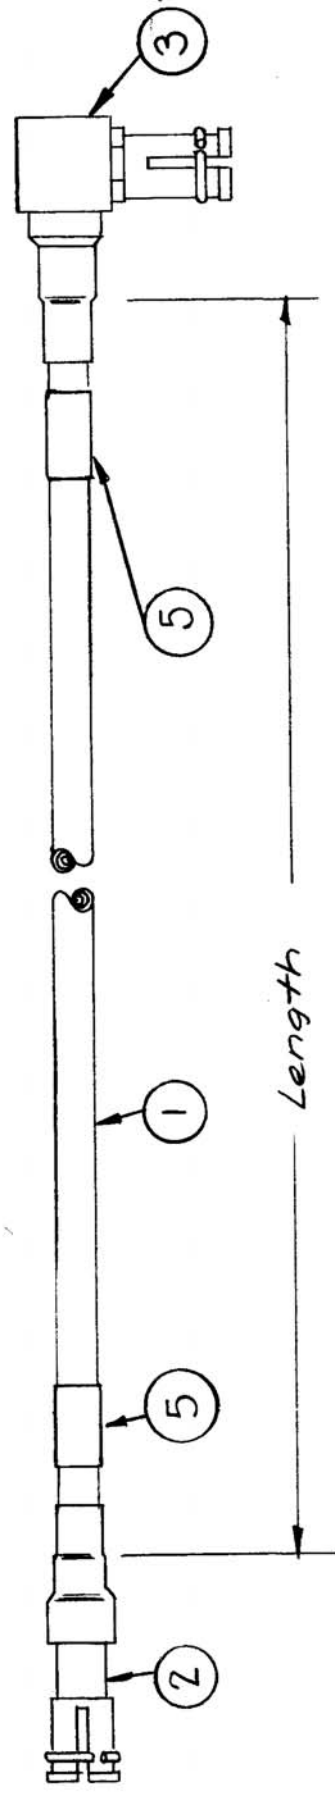

Type Designation as follows:

CA-349 - L

TMC NO. LENGTH (inches)  
 (See Examples)

Examples -  
 CA-349-5.31 = Cable Ass'y, 5 5/16" Long  
 CA-349-7.00 = " 7" Long

Note - See Spec. S-343 for Connector Ass'y. to Cable.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
2	LA-105-12	LABEL (See Chart)	
X	BS-100	Solder, Soft	
1	PL-155	Connector, Plug, Female, < 50Ω	
1	PL-154	Connector, Plug, Female 50Ω	
X	RG-174/U	Cable, Coax., Min.	

STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
MATERIAL		CABLE ASS'Y, MIN.	
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
		RWB	AWB
FINISH & SPEC. NO.		FINAL APPROVAL	
		CA-349 B	

ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	Chart & Item Added	2-2-61	4043	RU	QPS	AWB
A	NOMENCLATURE CLARIFIED	11/21/57	1	16	AWB	AWB

SCALE: 2X

TOLERANCES  
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.  
 REMOVE ALL BURRS AND SHARP EDGES

DEC. DIM. ±  
 FRAC. DIM. ±  
 ANGULAR DIM. ±