


B

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.


CA-742

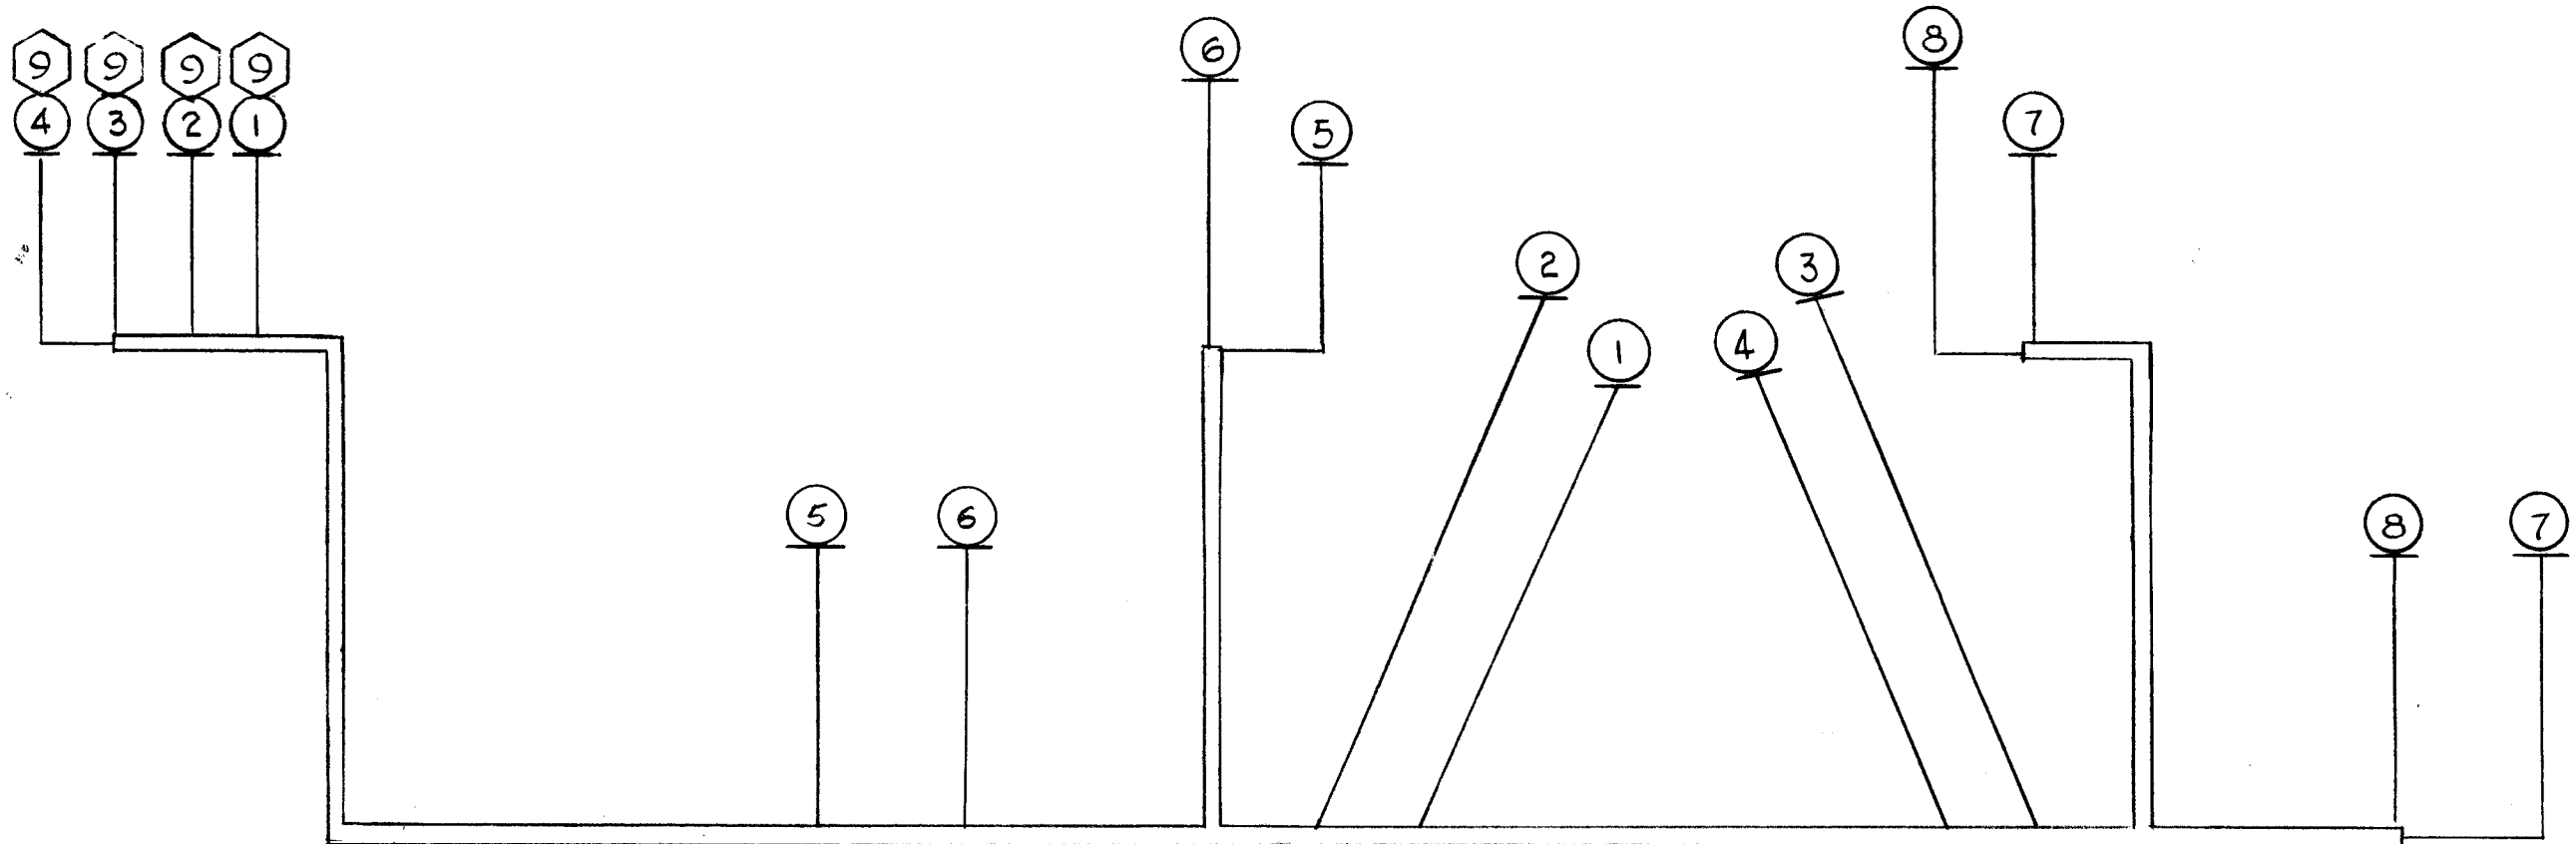

— SYMBOL NOTES —

- DENOTES ITEM NO'S
- ⬡ DENOTES LUGS

THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT & TINNED 3/8" UNLESS OTHERWISE SPECIFIED.



X	10	CD-101-1-MW	CORD LACING	
4	9	TE-120-2	SPADE LUG	
X	8	MWC22(7)U-93	CABLE, INSULATED	WHT/ORN
X	7	-94		WHT/YEL
X	6	-95		WHT/GRN
X	5	-90		WHT/BLK
X	4	-4		YEL
X	3	-3		ORN
X	2	-0		BLK
X	1	MWC22(7)U-5	CABLE, INSULATED	GRN

REQ.	ITEM	PART NO.	STRUMER	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK					
WIRING HARNESS, BRANCHED AUDIO LINE TO SPKR					
MATERIAL					
			G.D.L.	3/7/63	BP
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
				JMA	CA-742
FINISH & SPEC. NO.		ELEC. DES. APP.		MCH. DES. APP.	B

B	CALLOUTS 5 & 6 REVERSED	11-1-65	15260	Z.V.V.	OK	MM
A	ITEM (7) COLOR WAS WHT/GRN	4-26-63	8880		OK	MM
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:		SCALE: FULL SCALE				
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
TOLERANCES ON FRACTIONS ± 1/64		REMOVE ALL BURRS AND SHARP EDGES				
DECIMALS ± .005						
ANGLES ± 1/2°						
REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE		
1	LSP-II			2-23-63		
USED ON						