




TMC PART NUMBER	MFR. PART NUMBER	NO. OF CONTACTS	DIMENSIONS						FOR BOARD THICKNESS
			A	B	C	D	E	F	
JJ-287-20	84-7020-2100	20	2.410	2.156	1.864	1.723	1.404	.108	3/32

JJ-287

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD. APPD.
A	MFR P/N WAS FD-720-35 (FG)	5/18/70	—	ELA	JR

**SPECIFICATIONS**

- CONTACTS: A) TYPE: FEMALE, FLAT, SOLID FACE  
 B) CURRENT RATING: 5 AMP CONTINUOUS  
 C) VOLT. RATING: 600 VAC RMS  
 D) MATERIAL & FINISH: BERYLLIUM COPPER, GOLD PLATED
- DIELECTRIC: GLASS FILLED DIALLYL PHTHALATE; COLOR, GREEN
- FLOAT BUSHINGS: STAINLESS STEEL, PASSIVATED (ALLOWS 1/64 LATERAL MOVEMENT IN ANY DIRECTION)
- SHELL: NONE
- POLARIZATION: NONE
- LOCKING FEATURE: NONE

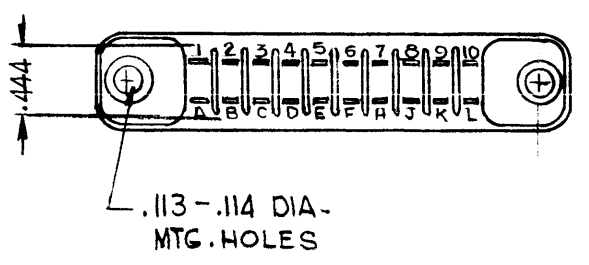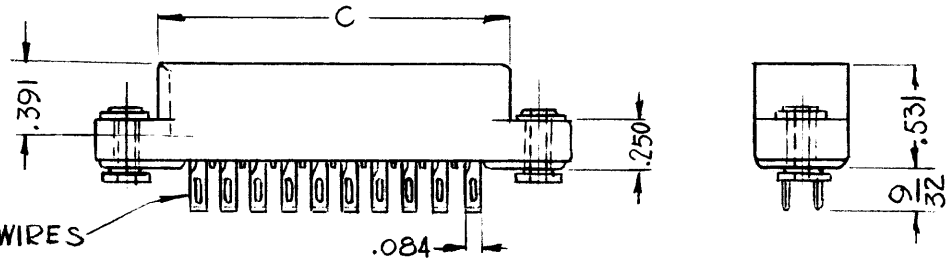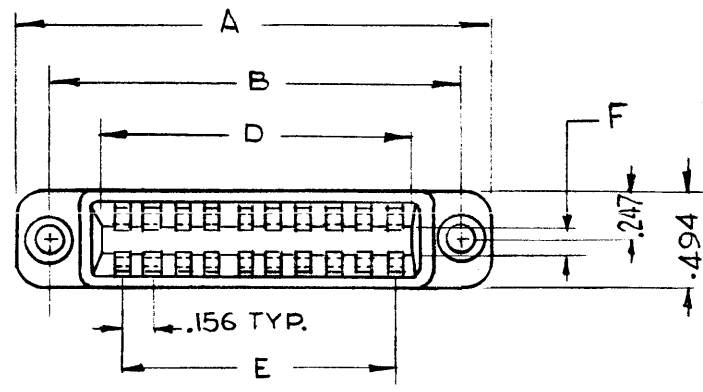

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
<b>KOHN LIST OF MATERIAL</b>				
MATERIAL		<b>THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK</b>		
FINISH		<b>TITLE CONNECTOR, RECEPTACLE, FEMALE PRINTED CIRCUIT BOARD</b>		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN G.D.L.	DATE 5-23-63	FINAL APPROVAL <i>BP</i>
		CHECKED <i>J.D.</i>	DATE 5/24/63	
		ELECT. DES. RIKOH	DATE 5/28/63	<b>JJ-287</b>
		MECH. DES. W. JORDAN	DATE 5/27/63	4
DECIMALS .X ± .05 .XX ± .01 .XXX ± .05		FRACTIONS ± 1/64 AN LES ± 0° 30'		SHEET
TOLERANCES				REV. LTR.

<b>8</b>	<b>TTR-10</b>	<b>CA-833</b>
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	5401-241

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

**NOTES**