


STANDARD DRAWING

JJ 332

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	10/28/66	X	RME		
Ø	ORIGINAL RELEASE FOR PRODUCTION	12/1/66	Ø	CV		

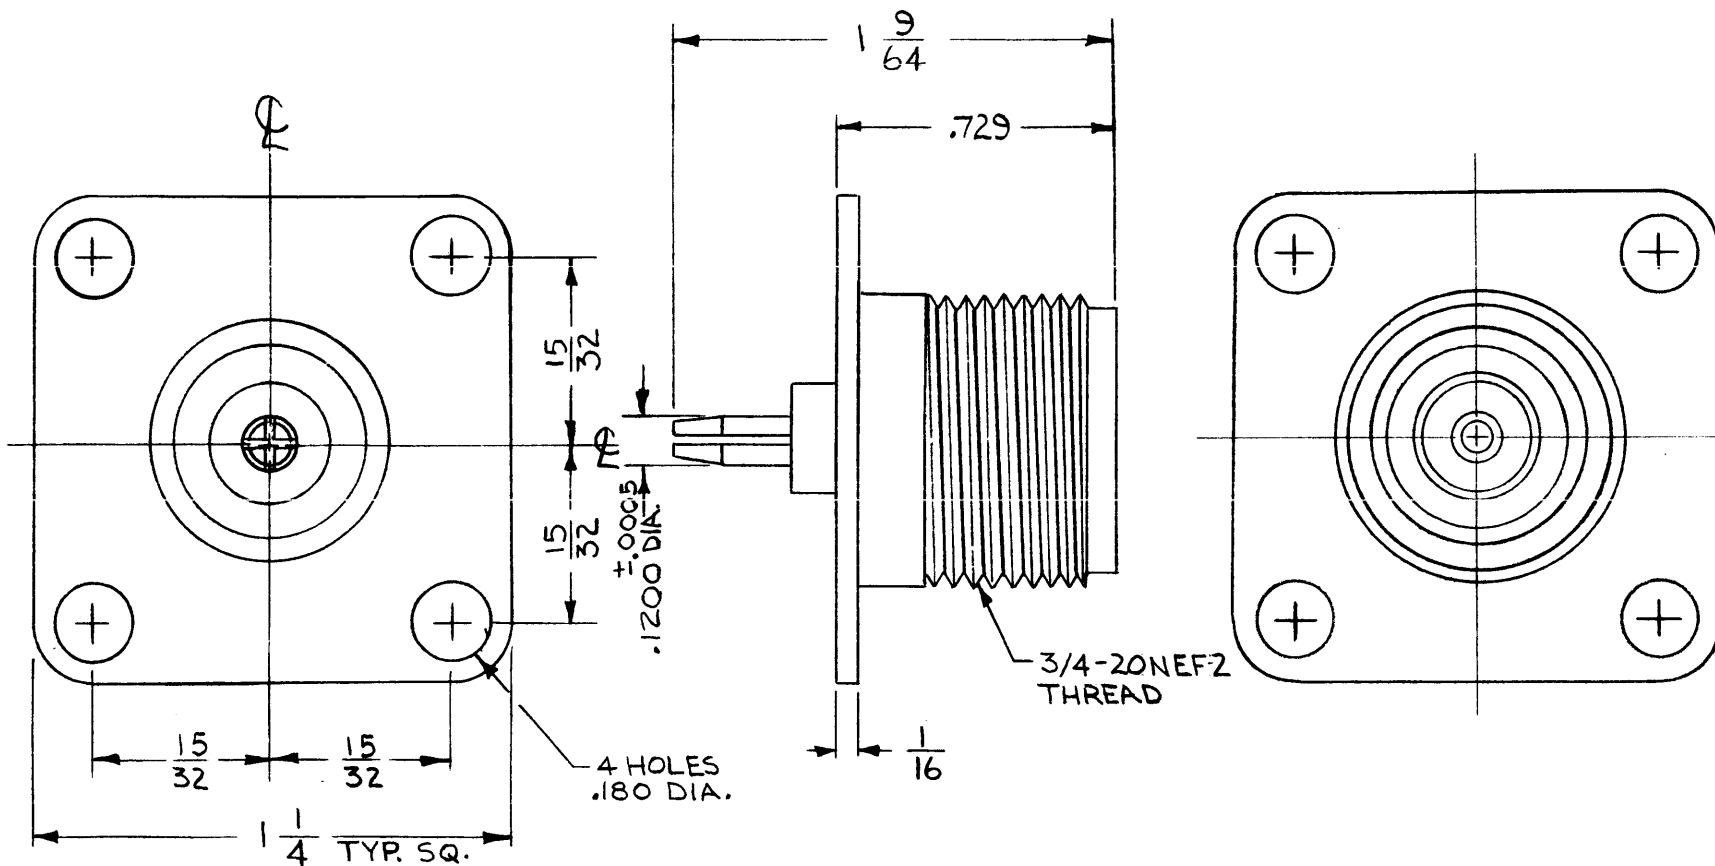

ELECTRICAL SPECIFICATIONS

IMPEDANCE : 50 Ω CONSTANT
 FREQUENCY RANGE : 0-10 GC
 VOLTAGE RATING : 1,500 VOLTS PEAK
 HIGH POTENTIAL : 5,000 VOLTS RMS.

MECHANICAL SPECIFICATIONS

MATING : 3/4-20 THREADED COUPLING
 DIELECTRIC : TEFLON
 MATERIAL : BRASS, NICKEL PLATED
 TYPE OF CONTACTS : FML
 STYLE : ROUND
 TYPE OF LOCKING : THREADED

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
BUDETTI LIST OF MATERIAL				
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
SEE SPECS		CONNECTOR, ELECTRICAL, RF, "HN"		
FINISH		TITLE		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN RME	DATE 10/28/66	FINAL APPROVAL [Signature]
		CHECKED [Signature]	DATE 11/29/66	DATE 12/1/66
		ELECT. DES. [Signature]	DATE 12/1/66	JJ 332
		MECH. DES.	DATE	Ø
		M/L [Signature]	DATE 12/6/66	REV. LTR.

Q'TY./UNIT		TST 2.5K		ASS'Y. NO.
SCALE	MODEL USED ON	CODE	S 401-164 (424073)	
2:1				

NOTES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.