
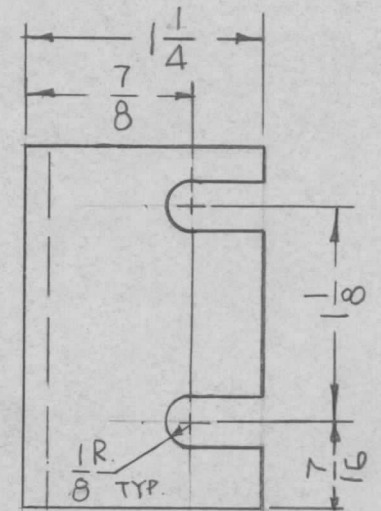


MARK TMC P/N
 $\frac{1}{8}$ " HIGH GOTHIC
 W/LATEST REV.
 LETTER.

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1 EA	RAK-110-2A		6-20-66
1 EA	RAK-110-2G		6-20-66
1 EA	RAK-110-2K		6-20-66
1 EA	RAK-110-2N		6-20-66

MS5015 \emptyset

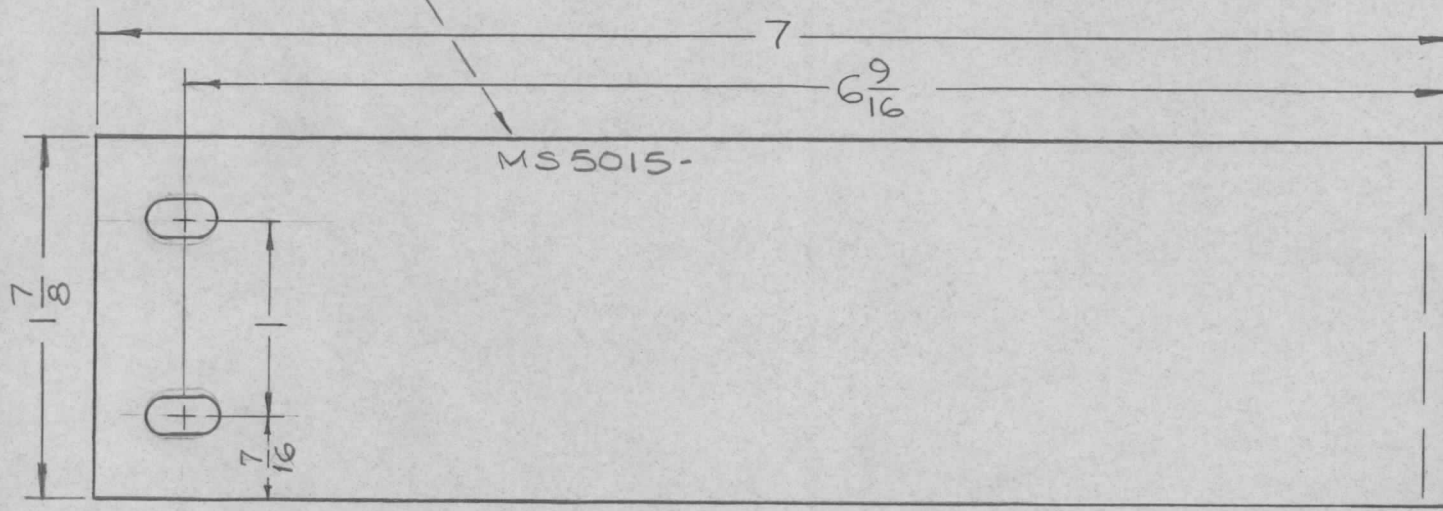

SLOTS:
 $\frac{3}{16} \times \frac{3}{8}$ (2REQ.)

MS5015-1 AS SHOWN
 MS5015-2 OPPOSITE HAND

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	F. BUDETTI DESCRIPTION				SYMBOL	
		$\frac{1}{8}$ THICK	THE TECHNICAL MATERIEL CORP.					
		STOCK SIZE	MAMARONECK, NEW YORK					
\emptyset	ORIGINAL RELEASE FOR PRODUCTION	12.13.66	4	WFO			BRACKET, SUPPORT CHASSIS	
X	EXP. RELEASE	6-20-66	X	WFO				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1					
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005		FRACTIONS \pm 1/64 ANGLES \pm 0° 30'		CODE A		5052-H32		
TOLERANCES		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		
		SA04 YEL IRIDITE		MS5015		\emptyset		