


HOLES:

A - DRILL .144 DIA. C' SINK 82° TO .284 DIA.
(5 REQ.)

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1EA	AX-633	A5559	8-25-66
1EA	AX-646	A5560	8-25-66
1EA	AX-647	A5561	8-25-66

MS5053 ∅

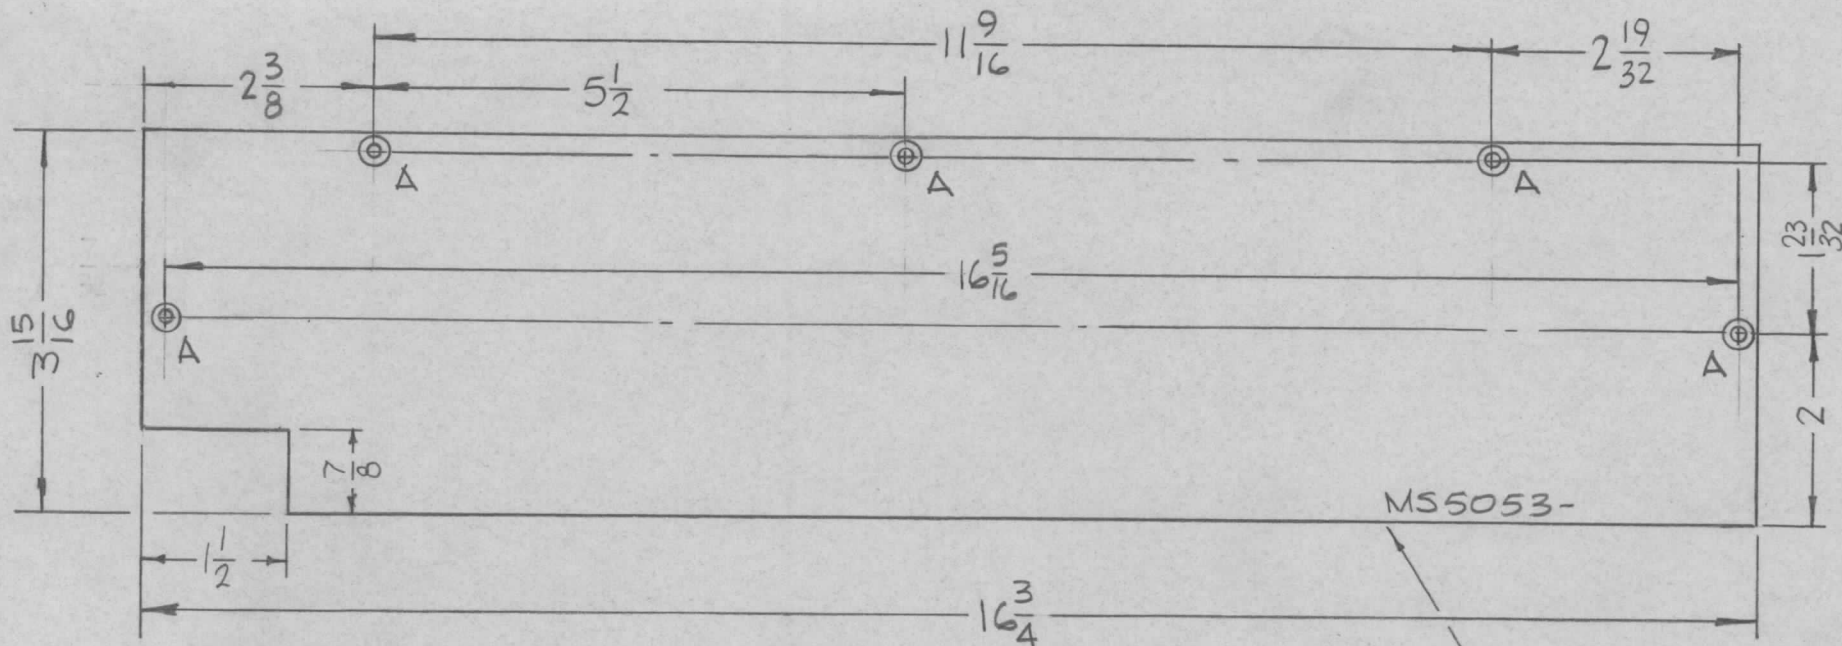

MS5053-1 AS SHOWN
MS5053-2 C' SINK FROM OPP. SIDE.

MARK TMC P/N
1/8 HIGH GOTHIC
W/LATEST REV. LETTER.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
∅	ORIGINAL RELEASE FOR PRODUCTION	12/30/66	∅	RME			.051 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK		
X	EXP. RELEASE	8-25-66	X	<i>[Signature]</i>			ALUMINUM		COVER, TOP & BOTTOM		
							MATERIAL				
							5052-H32		<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>
							TYPE & TEMPER		DRAWN		CHECKED
							S404 YEL. IRIDITE		<i>[Signature]</i>		<i>[Signature]</i>
							FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.
											MS5053 ∅