REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS5071	Ø
1	PSP-350C		9-2-66		

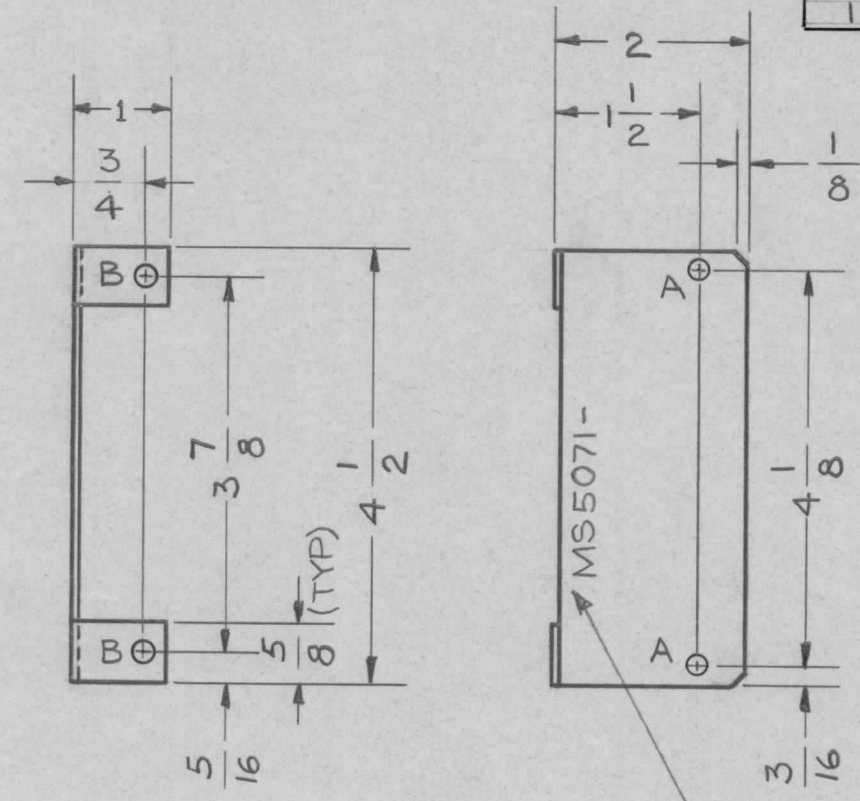

HOLE CHART		
SYM	DESCRIPTION	REQ'D
A	9/64 DIA	2
B	15/64 DIA	2

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

MARK TMC P/N 1/8 HIGH GOTHIC W/LATEST REV LETTER

REF: LD 2159

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	3-20-67		L.A.K.		
X	EXPERIMENTAL RELEASE	9/2/66	X	CED		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:2

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE

REQ.	ITEM	PART NO.	BUTLER DESCRIPTION	SYMBOL
		.063	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		STOCK SIZE	PLATE, MOUNTING, SWITCH	
		ALUMINUM		
		MATERIAL		

5052-H32	H32	CED 9/2/66		
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
S404 YEL IRIDITE				MS5071 Ø
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

TMC FORM 108-A

REPROVEL NO. 440H