


REQ. PER UNIT	USED ON			MS 5072 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	PSP 350C		9-2-66	

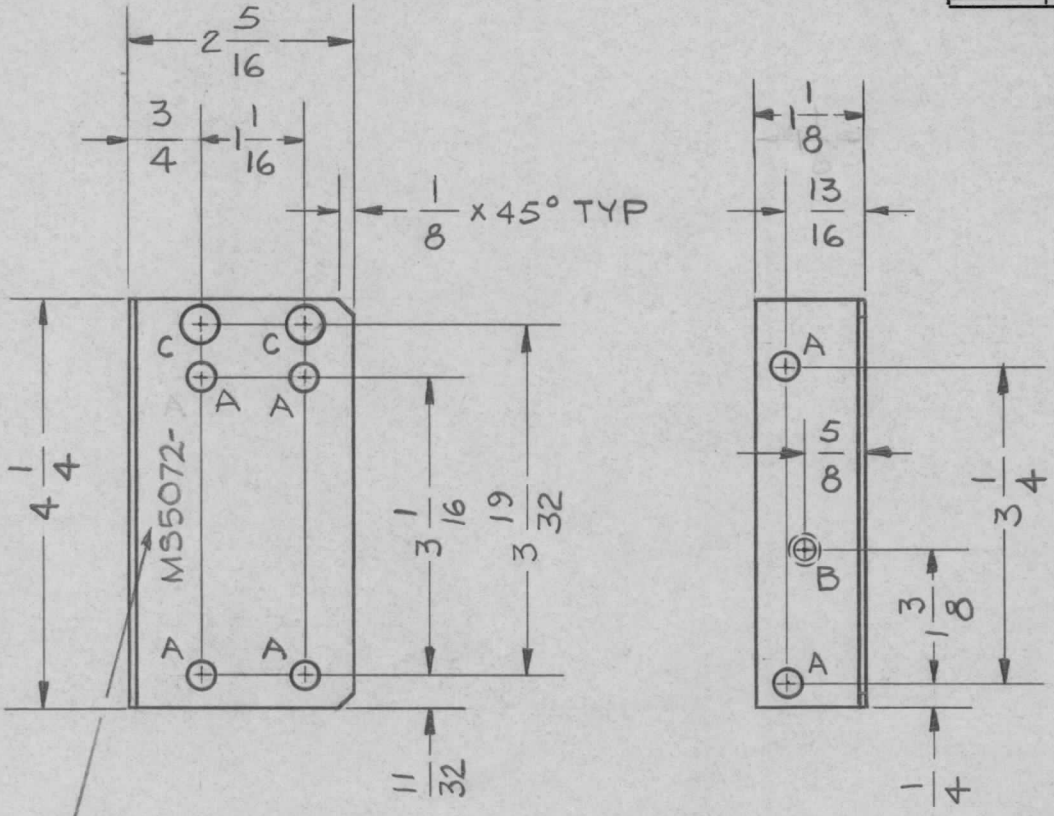

NOTE

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

HOLE CHART		
SYM	DESCRIPTION	REQ'D
A	9/32 DIA THRU	6
B	.144 DIA. THRU C'SK 82° TO .284 DIA	1
C	3/8 DIA	2

MARK TMC P/N 1/8 HIGH GOTHIC W/LATEST REV. LETTER

REF: LD 2158

REQ. ITEM	PART NO.	BUTLER	DESCRIPTION	SYMBOL
	.063		THE TECHNICAL MATERIEL CORP.	
	STOCK SIZE		MAMARONECK. NEW YORK	
	ALUMINUM		PLATE, MOUNTING, RECTIFIER	
	MATERIAL			
5052-432	H 32	CED 9/2/66	Q/B	M. May LB
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
S404 YEL IRIDITE				MS 5072 \emptyset
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:2

DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005

FRACTIONS
± 1/64
ANGLES
± 0° 30'

TOLERANCES

DATE 3-20-67
CH. NO. X
DRAFTS L.A.K.
CHECKER C.E.D.
ENG. APP.