



HOLE	DESCRIPTION	REQ
A	9/64 DIA	16
B	SEE DETAIL	1
C	3/16 DIA	1

REQ. PER UNIT	USED ON			MS5112	D
	MODEL	ASS'Y. NO.	DATE		
1	VOX-7	BMA-114	5-1-67		
1	MMX-()				



MARK TMC P/N
1/8 HIGH GOTHIC W/LATEST
REV. LETTER

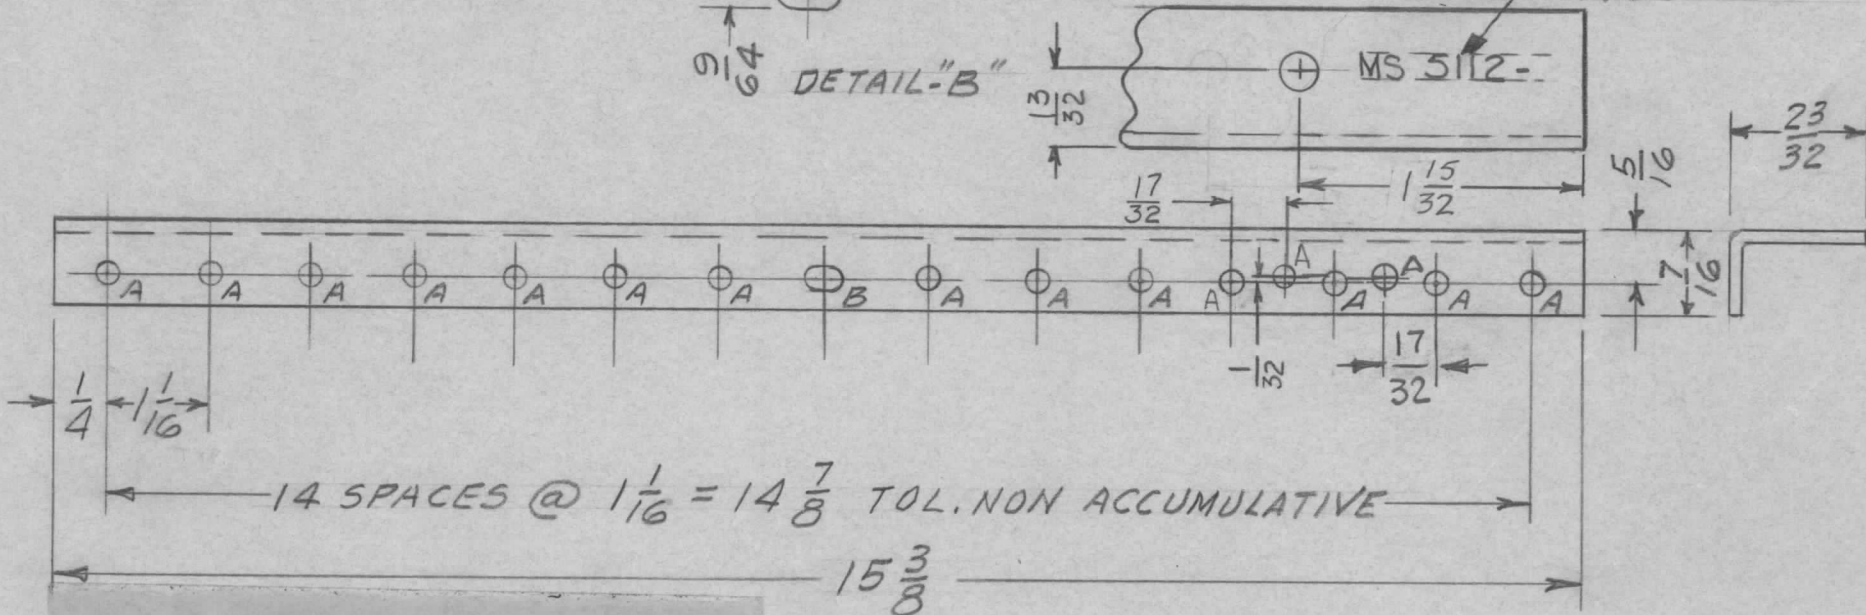

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	O. POSE	DESCRIPTION	SYMBOL	
D	ONE A HOLE ADD	4-13-78	21643	GDL				.063 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
C	1-15/32 WAS 1-7/8 DIM	6.4.68	18955	HG				ALUMINUM			ANGLE, STIFFENER	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		DO NOT SCALE			5052-H32		GDL			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE		5401-451	5404 YEL. IRIDITE					
TOLERANCES		A					FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS5112	D