


APPLICATION

QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
2	HERR-4		X	EXP. RELEASE	1-19-68				
			Ø	ORIG. RELEASE FOR PROD.		Ø	R.G.		Hide

REVISIONS

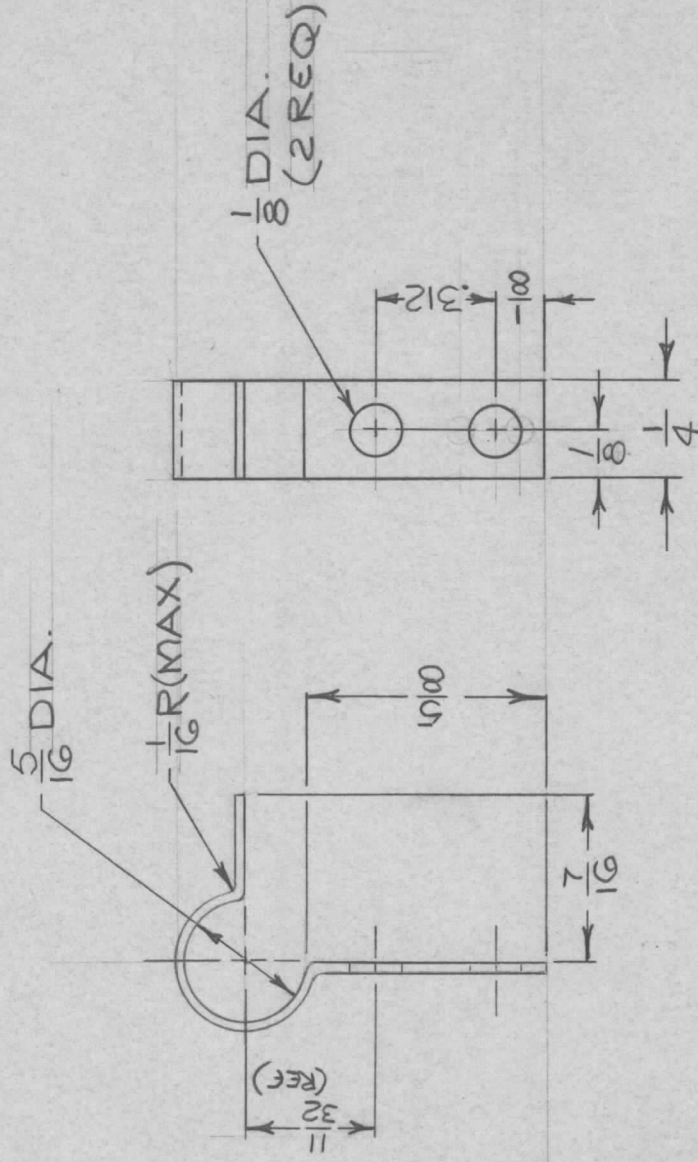

MAT'L
 .015 THK. SPRING PHOS. BRONZE
 HEAT TREAT 600°F FOR 4 HOURS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	HOGAN		LIST OF MATERIAL SK 3252-003-4G X	
FRACTIONS 1/64	FINAL APPROVAL <i>[Signature]</i>		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
TOLS. ANGLES 0°-30°	MECH. DES. M. ZEJENA	DATE 11/1/68		
MATERIAL AS NOTED	ELECT. DES.	DATE		
FINISH NATURAL	CHECKED SG	DATE 1-20-68	SPRING, LIMIT SWITCH, ACTUATING	
S401-451	DRAWN <i>[Signature]</i>	DATE 1-19-68		

NOTICE TO PERSONS RECEIVING THIS DRAWING	SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.	A	82679	MS 5299	Ø
	SCALE 2:1		SHEET	OF