
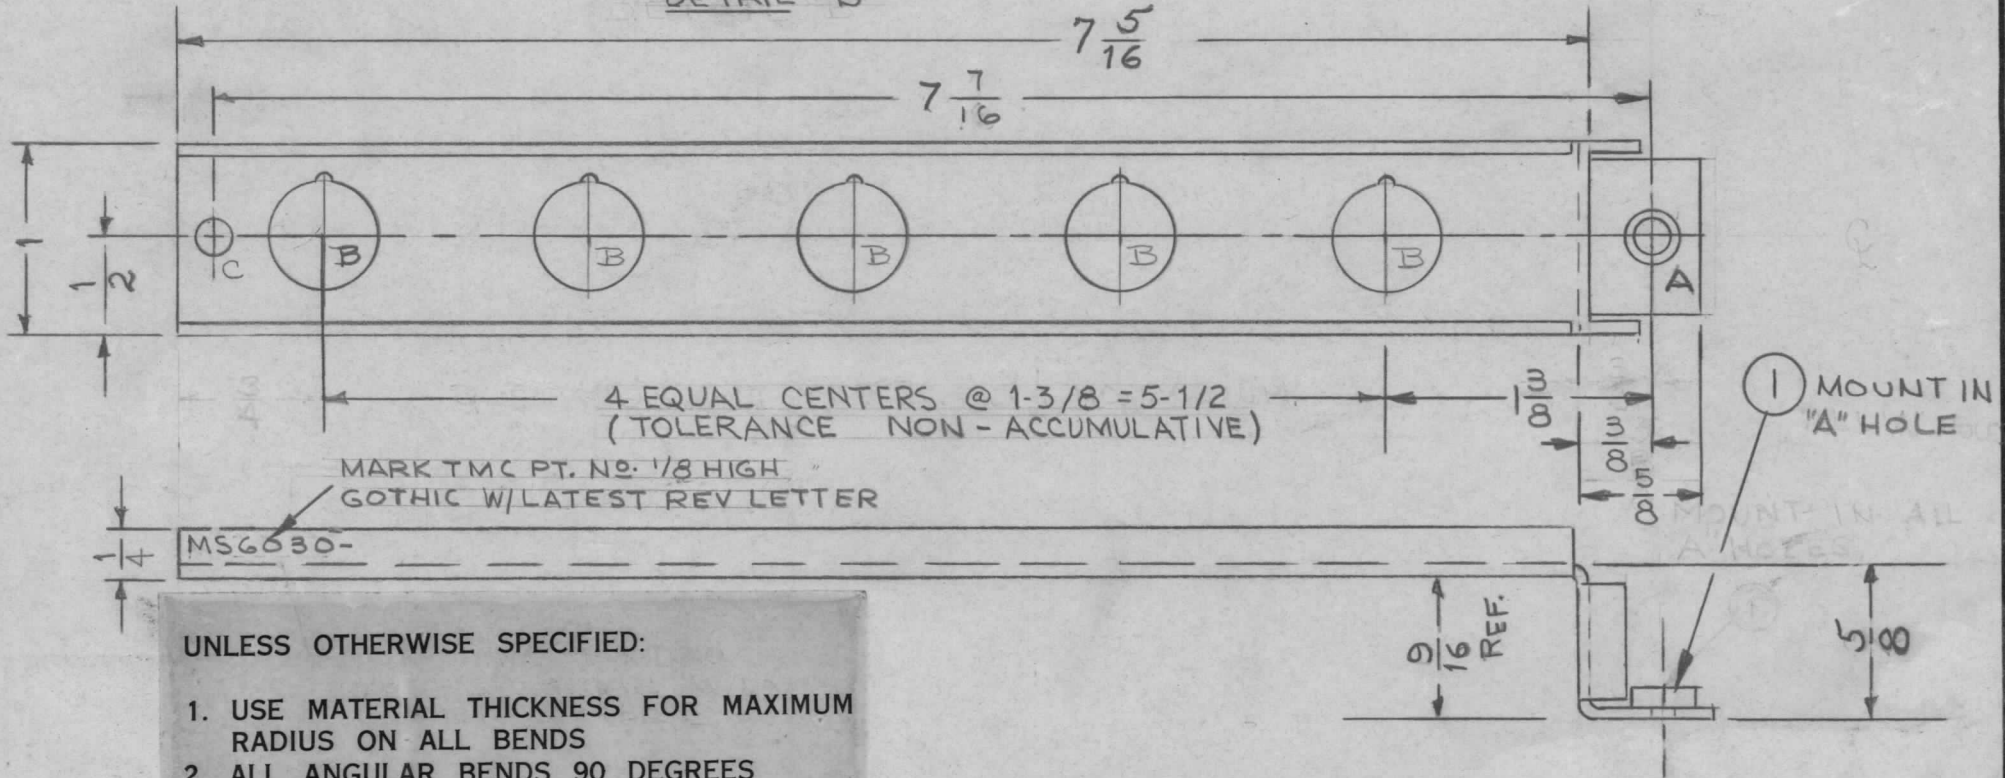


HOLE LEGEND		
HOLE	DESCRIPTION	REQ. D
A	.191-.194 DIA	1
B	SEE DETAIL	5
C	11/64 DIA.	1

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
2	KMCI-1		11-15-66

MS6030 ϕ



- UNLESS OTHERWISE SPECIFIED:**
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

1	1	NT129-632-4	NUT PLAIN, SPLINE	A
REQ. ITEM	PART NO.		DESCRIPTION REF. SK3254-3	SYMBOL
	.063 THK.		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	STOCK SIZE		BUTTON, SUPPORT, BRACKET	
	ALUMINUM			
	MATERIAL			
	5052-H32		RME	
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
	S404-YEL. IRIDITE			
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	
				MS6030 ϕ

ϕ	ORIGINAL RELEASE FOR PRODUCTION	12-19-66	ϕ	RME			
X	EXP. RELEASE	11-15-66	X	RME			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1			
DECIMALS	FRACTIONS	CODE					
.X ± .05	± 1/64						
.XX ± .01	ANGLES						
.XXX ± .005	± 0° 30'						