



| | | | | |
|---------------|---------|------------|----------|--------|
| REQ. PER UNIT | USED ON | | | MS6031 |
| | MODEL | ASS'Y. NO. | DATE | |
| 1 | KMCI | | 11-14-66 | |

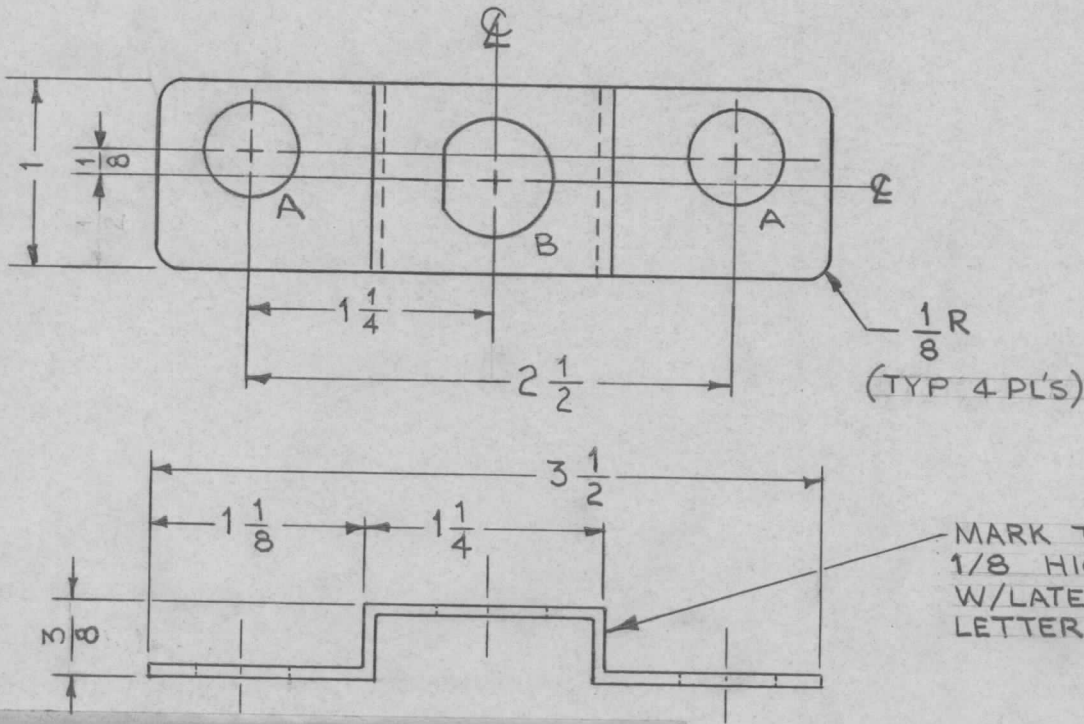

| HOLE LEGEND | | |
|-------------|-------------|------|
| HOLE | DESCRIPTION | REQ. |
| A | 1/2 DIA. | 2 |
| B | SEE DETAIL | 1 |



UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | REQ. ITEM | PART NO. | L. BUTLER | DESCRIPTION | SYMBOL |
|-----|---------------------------------|----------|---------|--------|---------|-----------|--------------------|-------------------|--|-----------------|----------------|
| Ø | ORIGINAL RELEASE FOR PRODUCTION | 12-19-66 | Ø | RME | | | .064 THK. | | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | | |
| X | EXP. RELEASE | 11-14-66 | X | RME | | | STOCK SIZE | | BRACKET, MTG, FUSE | | |
| | | | | | | | ALUMINUM | | | | |
| | | | | | | | MATERIAL | | | | |
| | | | | | | | 5052-H32 | | RME | | |
| | | | | | | | TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKED | FINAL APPROVAL |
| | | | | | | | 5404 YEL. IRIDITE | | | | MS6031 |
| | | | | | | | FINISH & SPEC. NO. | | ELEC. DES. APP. | MECH. DES. APP. | |