


REQ. PER UNIT	USED ON			MS 6561	Ø
	MODEL	ASS'Y. NO.	DATE		
1	GPR 110 (KIT 404)	A5606	9-23-74		

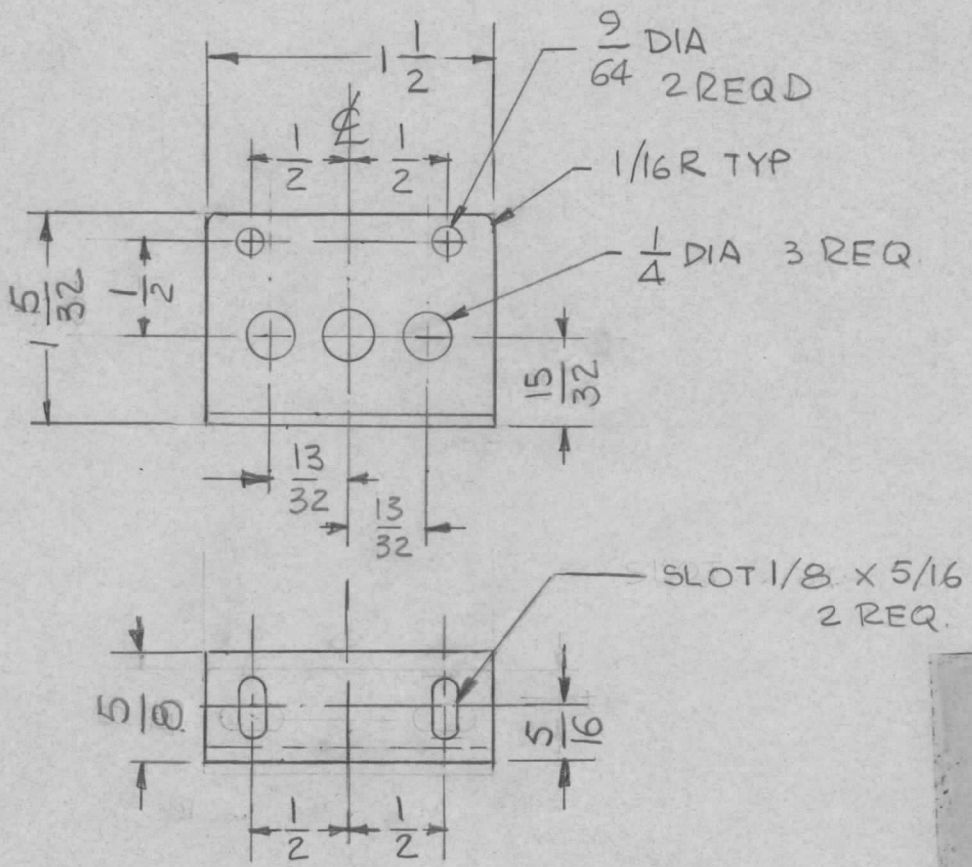

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90 DEGREES.
3. REMOVE ALL BURRS AND SHARP EDGES.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL	
Ø	ORIG REL PROD	5-20-74	JP	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
X	EXP. RELEASE	9-23-74		STOCK SIZE .064 THK ALUM.				BRACKET DETENT
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE		5052-H32		G. Debus	Ø
			1:1		TYPE & TEMPER		CHECKED	FINAL APPROVAL
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			FRACTIONS ± 1/64 ANGLES ± 0° 30'		S404 YEL IRIDITE		Ø	MS 6561 Ø
TOLERANCES			CODE		FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.