
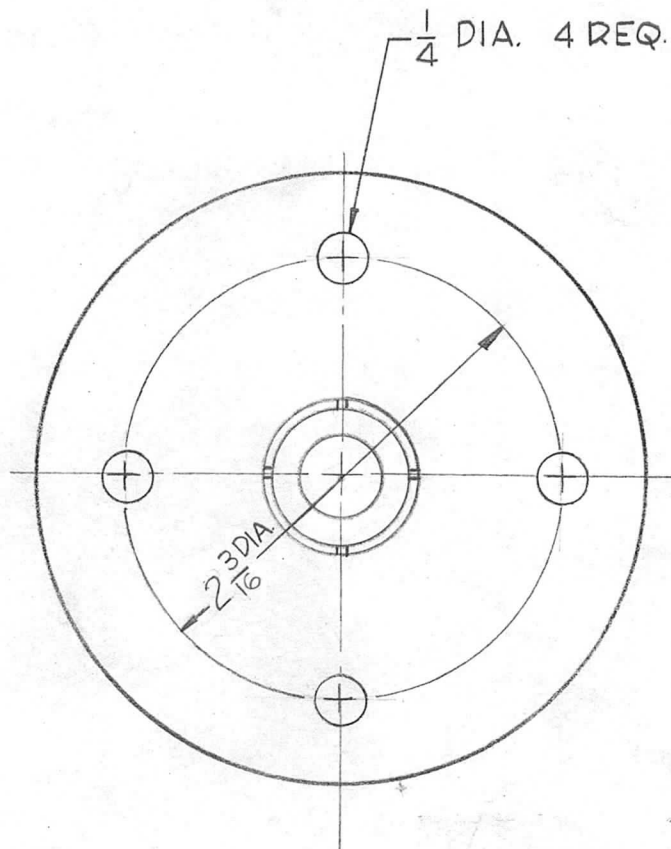


REQ. PER. UNIT	USED ON			PO-211	C
	MODEL	ASS'Y. NO.	DATE		
1	ACU		5-3-61		

NOTE ~ TO BE SUPPLIED WITH INNER "C" RING SPRING.

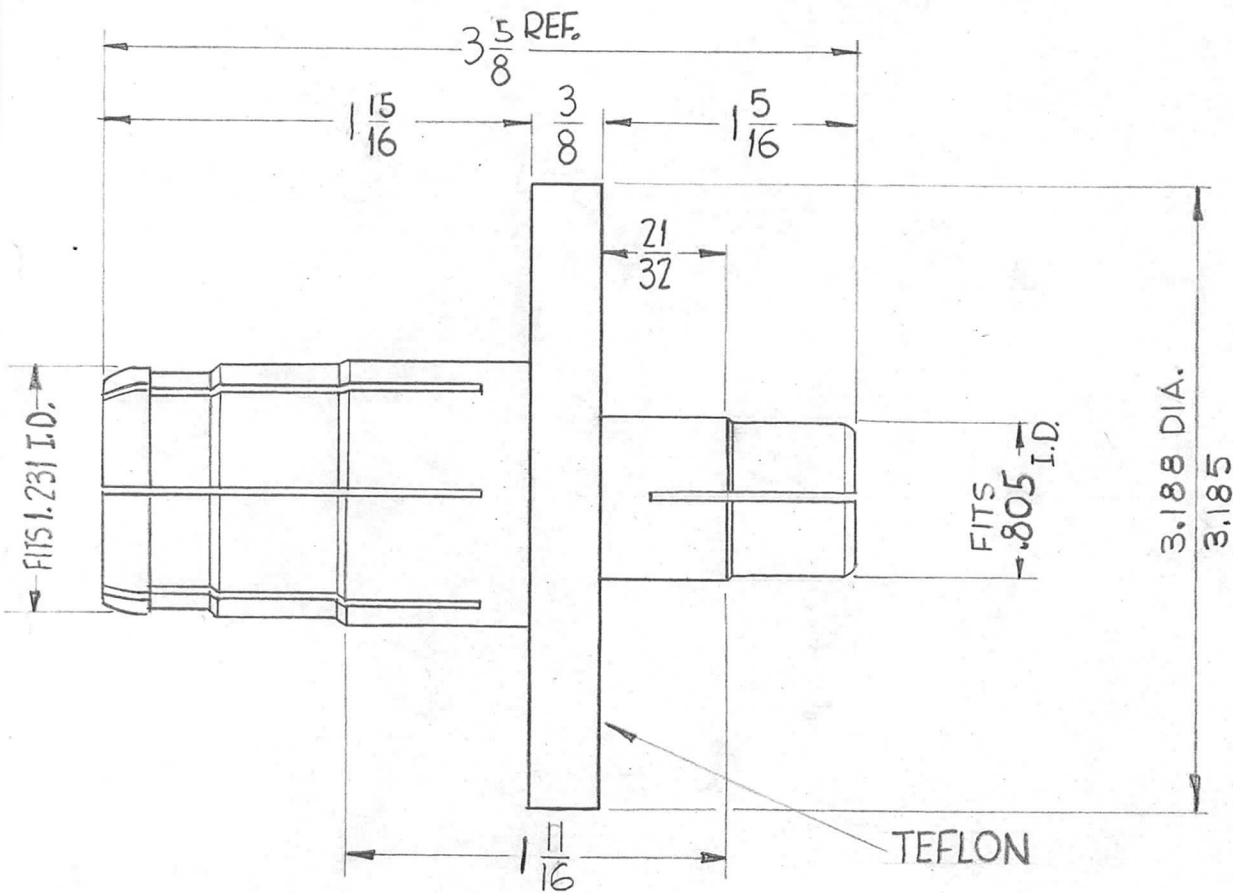

C	4	DIM 1-15/16 WAS 2-3/16	7-13-62	6912	[Signature]	[Signature]	[Signature]
	3	DIM 3-5/8 WAS 3-1/8					
	2	75 Ω WA 70 Ω (TITLE)					
	1	ANDREW PART NO. ADDED					
B	2	1-11/16 Dim. Was 1-3/4	1-24-62	6101	[Signature]	[Signature]	[Signature]
	1	4 1/4 Dia. Holes Added					
A	1	"C" RING Note Added	7/26/61	5333	[Signature]	[Signature]	[Signature]
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: S401-31-25570				
DEC. DIM. ± .005			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
FRAC. DIM. ± 1/64							
ANGULAR DIM. ±							

REQ.	ITEM	PART NO.	DESCRIPTION		SYMBOL
			THE TECHNICAL MATERIEL CORP.		
			MAMARONECK, NEW YORK		
			INNER CONNECTOR, 3-1/8		
			50 TO 75 Ω ADAPTOR		
MATERIAL			DRAWN		FINAL APPROVAL
TYPE & TEMPER			[Signature]		[Signature]
HEAT TREAT. SPEC.			[Signature]		[Signature]
FINISH & SPEC. NO.			ELEC. DES. APP		MECH. DES. APP
			[Signature]		PO-211
					C