


TMC P/N	A
PX908-1	1/4
PX908-2	5/16
PX908-3	3/8
PX908-4	7/16

REQ. PER UNIT	USED ON			PX908	A
	MODEL	ASS'Y. NO.	DATE		
1 EA.	RFTA-1		12-14-64		

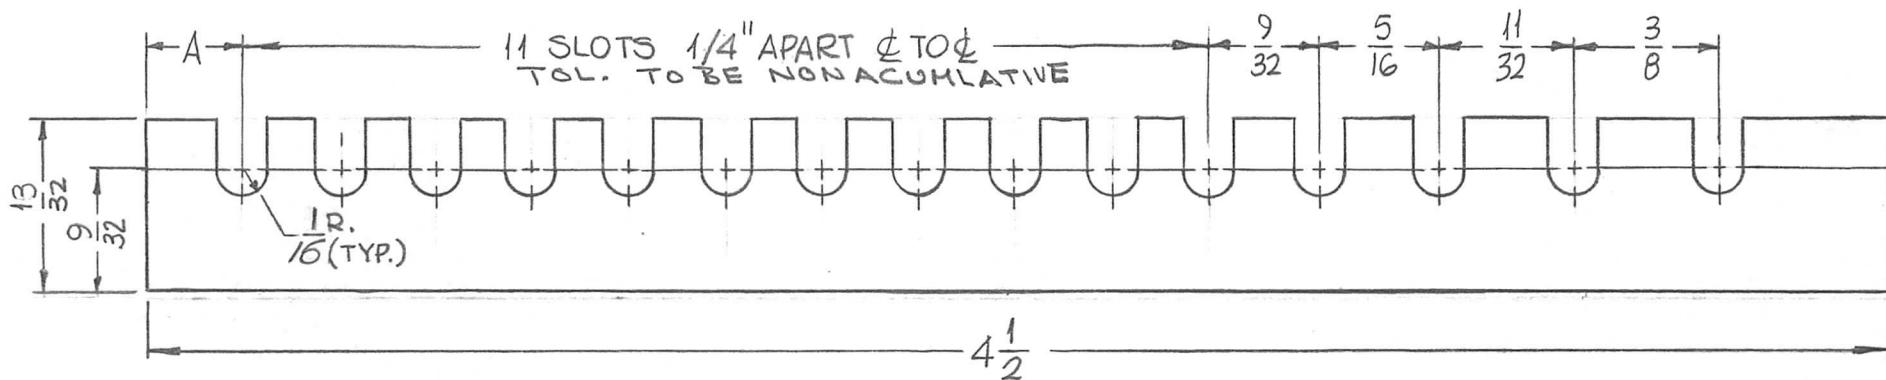

A	1/16 R WAS 1/8 R	1/3/69 19/77	K.H.	J.H.	FB	J.H.												
Ø	ORIGINAL RELEASE FOR PRODUCTION	6/13/66	Ø	CV		J.H.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK		SYMBOL					
X2	CHANGE 1/8 THICK TO .125	6-18-65	X2	SRG	KA		.125 THICK		SPACER, TUNING COIL									
X1	13/32 WAS 15/32, 9/32 WAS 11/32	1-13-65	X1	SRG			STOCK SIZE											
X	EXP. RELEASE	12-14-64	X	SRG			TEFLON		MATERIAL									
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	TRE.	—						SRG	JCB	JB	mlk	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE											
							2:1		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE	A		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		PX908		A	