


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	EN. NO.	DRAFTS	CHECKER	ENG. APP.
0		REL TO PROD	10-4-67		RD		<i>[Signature]</i>



WS10005

REQ	ITEM	PART NO	DESCRIPTION	SYMBOL
-----	------	---------	-------------	--------

NOTE:
FOR SHIELDS BETWEEN WAFERS
USE MS10824


NOTES:

TOTAL NO. OF POSITIONS: 4
ANGLE OF THROW: 30°
CONTACTS & ROTORS: SHORTING _____ NON SHORTING X

MATERIALS & FINISHES

STATOR CONTACTS & TERMINALS: BRASS, DENSELY SILVER PLATED.
ROTOR CONTACTS: SILVER-BRASS LAMINATED OVERLAY: SILVER PLATED
ROTOR INSULATION MATERIAL: NYLON
STATOR INSULATION MATERIAL: GLASS REINFORCED ALKYD, GRAY
FINISH REQUIREMENTS:

COMMERCIAL: X MILITARY _____
SALT SPRAY 50 HR. X 200 HR. _____
SPECIAL INSTRUCTIONS: NO STOPS

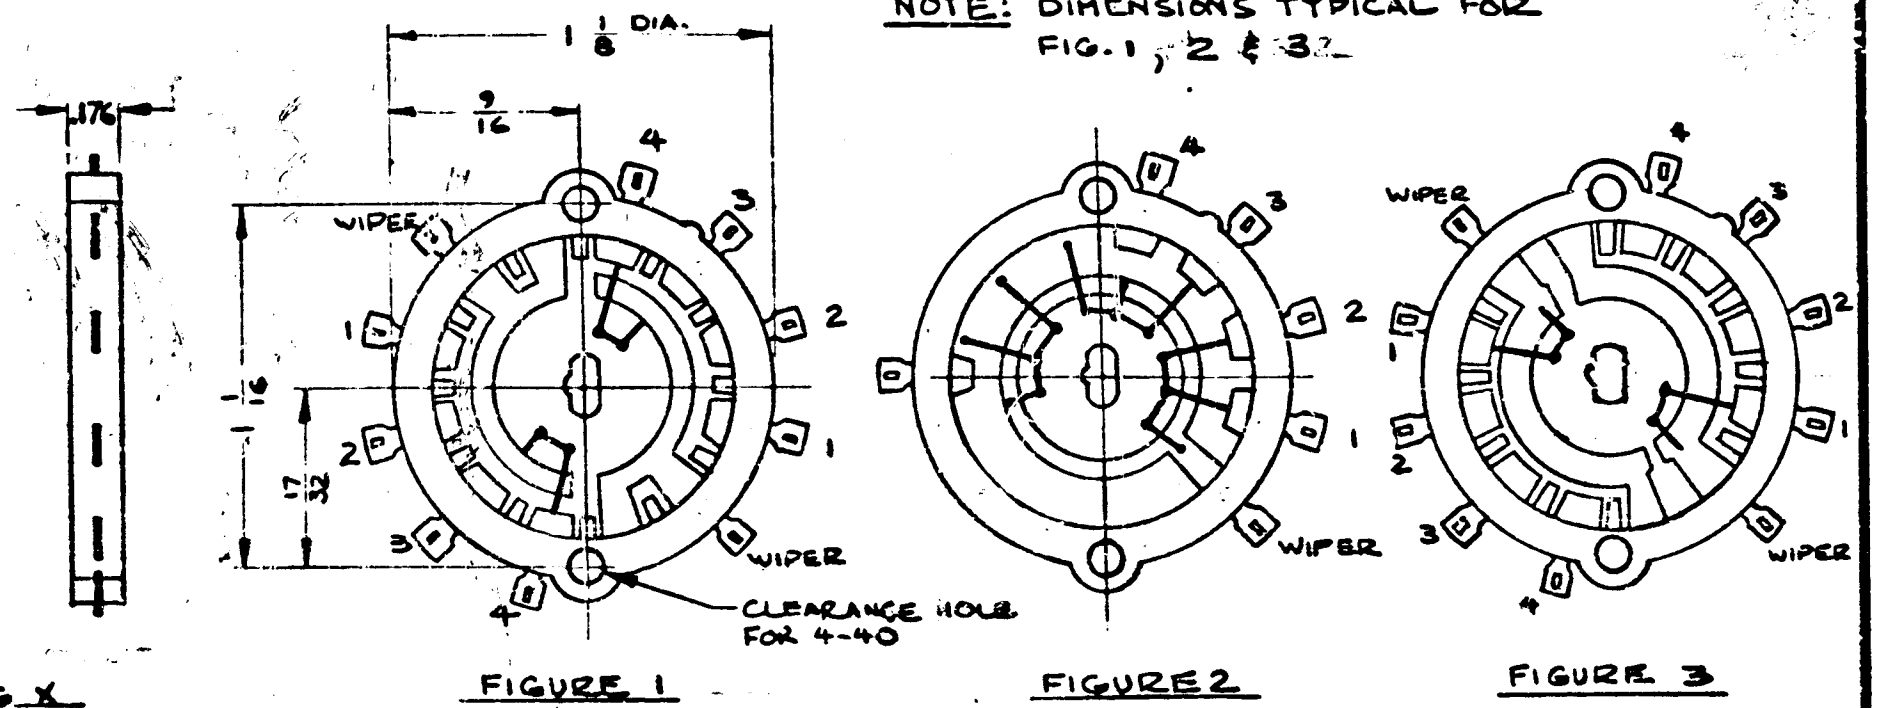

NOTE: DIMENSIONS TYPICAL FOR FIG. 1, 2 & 3.

TMC PART NO.	MFGR. PART NO.	FIGURE NO.
WS10005-1	212-204A	FIGURE 1
WS10005-2		FIGURE 2
WS10005-3		FIGURE 3



STANDARD DRAWING

MFGR. # 5401-175

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		WAFER, ROTARY	
WEIGHT PER PC		RDL	
TYPE & TEMPR		DRAWN <i>[Signature]</i> ELEC DES APP <i>[Signature]</i> MECH DES APP <i>[Signature]</i>	
HEAT TREAT SPEC		CHECKED <i>[Signature]</i> FINAL APPROVAL <i>[Signature]</i>	
FINISH & SPEC NO		WS10005	

TOLERANCES		SCALE: NTS		AX10033	053/67	MAR. 14/67
ALL OTHERS	DEC. DIM. ± .005 FRAC. DIM. ± 1/64 ANGULAR DIM. 10° 30' ± .005	DRILL, PUNCH, COMMERCIAL STOCK SIL. & MANUFACTURERS TOLERANCES ARE NOT INCLUDED.		MODEL	PROJECT NO.	DATE