
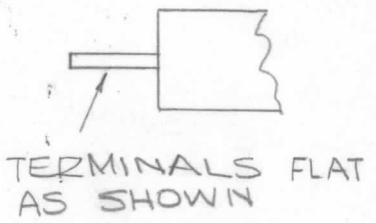


REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	X	EXP. RELEASE	2-4-67			
	Ø	ORIG RELEASE FOR PROD	4-3-67	Ø	CV	

SPECIFICATIONS

No. OF POSITIONS; 8 NO STOPS
 360° ROTATION
 ANGLE OF THROW: 30°
 CONTACTS: NON SHORTING TYPE
 STATOR CONTACTS & TERMINALS: BRASS, DENSELY SILVER PLATED
 ROTOR CONTACTS: SILVER-BRASS LAMINATED OVERLAY; SILVER PLATED
 ROTOR INSULATION MATERIAL: NYLON
 STATOR INSULATION MATERIAL: GLASS REINFORCED ALKYD, GRAY
 FINISH REQUIREMENTS: COMMERICAL
 ELECTRICAL SPECIFICATIONS:
 MAX. RATINGS: 1ADC @ 28 VDC
 1 1/2 AAC @ 115 VAC

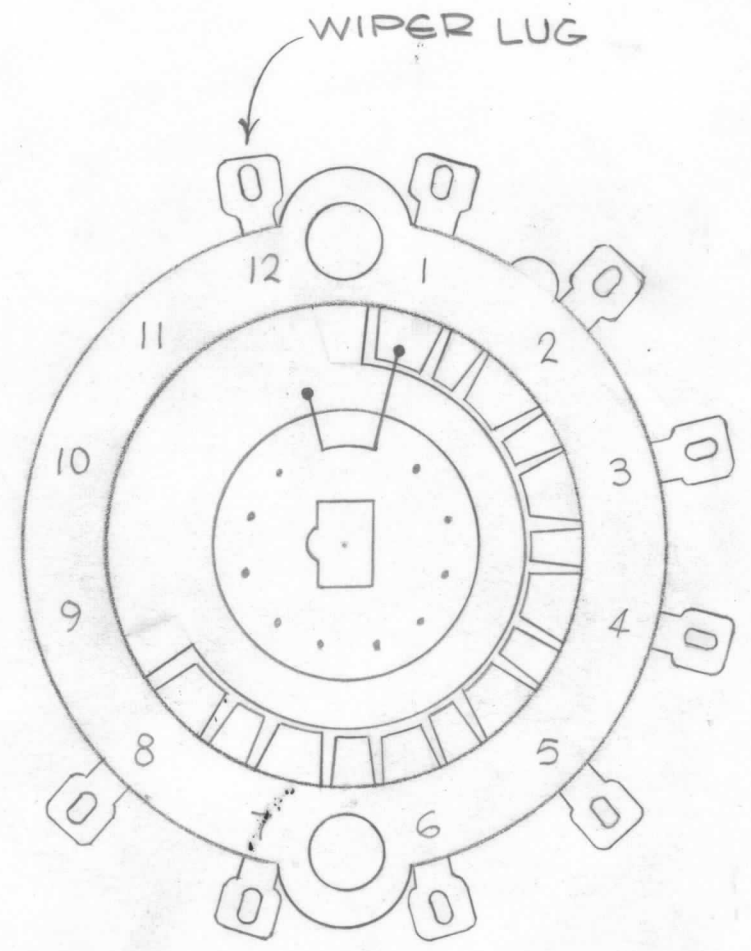

REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
	O. POSE		LIST OF MATERIAL	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 FRACTIONS 1/64 TOLS. ANGLES 0° .30'			WAFER, SWITCH, ROTARY (1P8T)	
MATERIAL			SIZE B CODE IDENT. NO. 82679 DWG NO. WS139	ISSUE Ø
FINISH			SCALE — M/L	SHEET OF

1	SMEE-1A	KIT329
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
	CODE C	S401-175
NOTICE TO PERSONS RECEIVING THIS DRAWING THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.		